
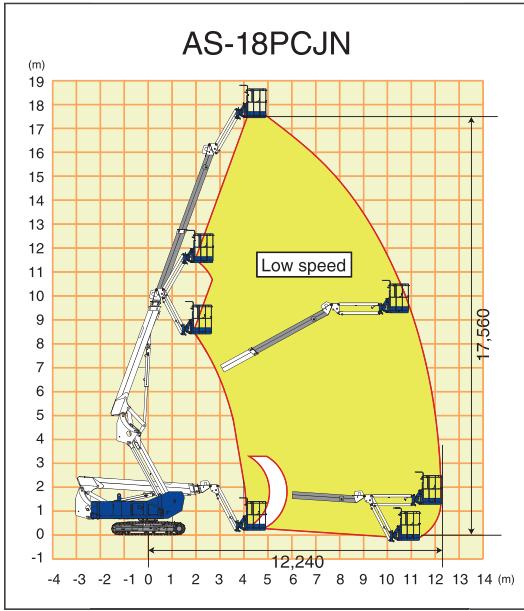


# AS-18PCJ/AS-18PCJN (NUS18J-7/NUS18JN-7)



Crawler type  
Telescopic boom lift

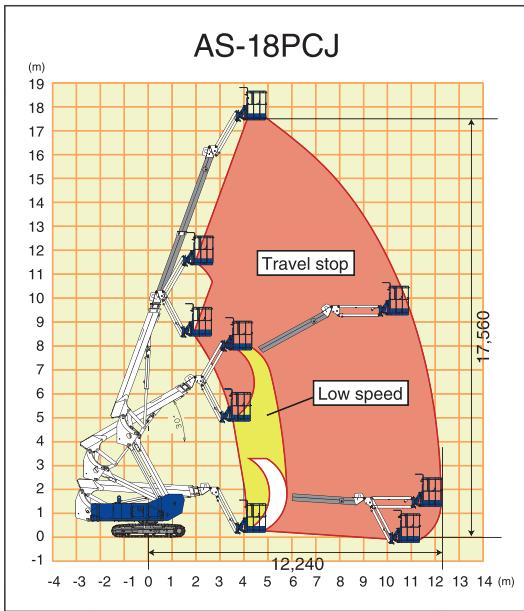

TYPE	AS-18PCJ/AS-18PCJN
<b>Platform capacity</b>	250 kg
<b>Allowable tilt</b>	5°
<b>Platform dimensions (W x L x H)</b>	1,130 x 730 x 1,000 mm
<b>Platform height (max)</b>	17,560 mm
<b>Horizontal reach</b>	12,240 mm
<b>Machine weight (w/pad)</b>	9,460 (9,700) kg
<b>Overall length</b>	7,955 mm
<b>Overall width</b>	2,250 mm
<b>Overall height</b>	2,480 mm
<b>Engine model</b>	KUBOTA D1305
<b>Travel speeds</b>	0.9/1.5/2.7 km/h

## Lifting the machine

- ⚠ Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Ensure the boom is in stowed position before lifting.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

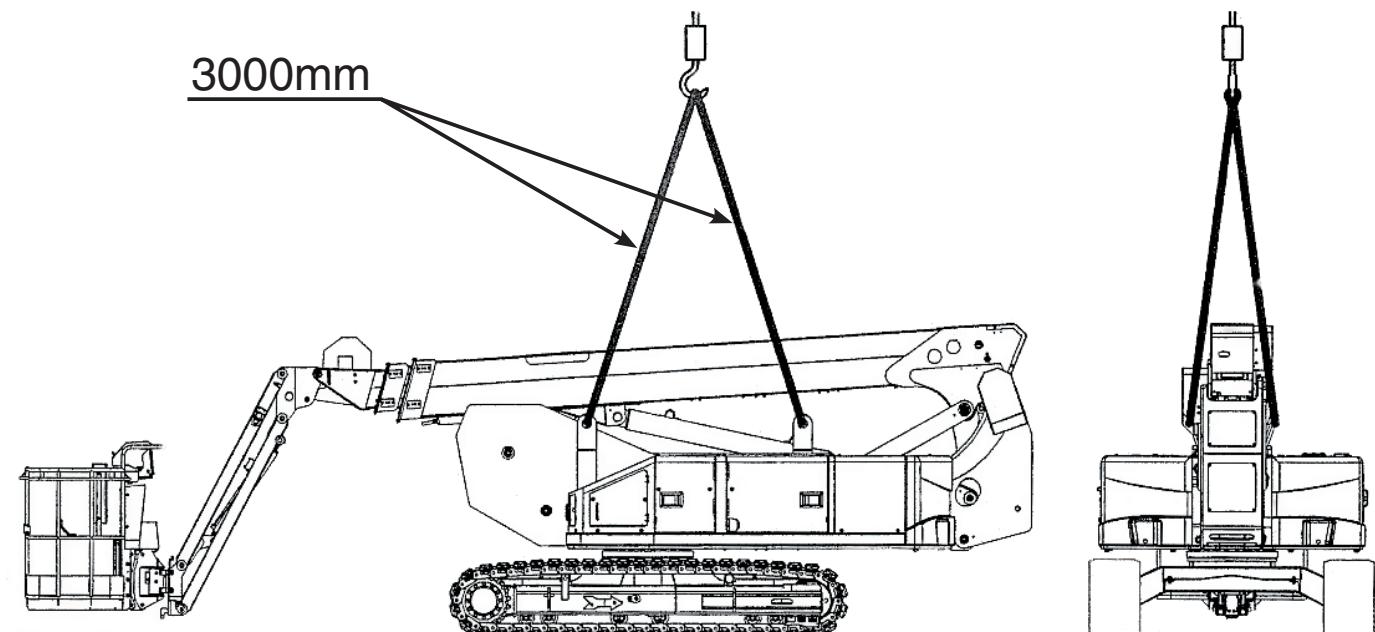

**Tadano Ltd.**

Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan

Phone: +81-3-6811-7309

[info@tadano.com](mailto:info@tadano.com)

[www.tadano.com](http://www.tadano.com)