



TADANO CARGO CRANE

MODEL : **TM-ZE365MH**

CRANE SPECIFICATIONS

CRANE CAPACITY 3,030 kg at 2.4 m (4-part lines)

BOOM Five-sectioned, fully powered partly synchronized telescoping boom of heptagonal box construction

Fully retracted length ----- 3.52 m
Fully extended length ----- 12.3 m
Extending speed ----- 8.78 m in 18 s
Elevation ----- Elevated by a double-acting hydraulic cylinder
Raising speed ----- 1° to 78° in 7.5 s
Boom point ----- 2 sheaves

WINCH Hydraulic motor driven Spur gear speed reduction, provided with mechanical brake and cable follower

Single line pull ----- 7.45 kN {760 kgf}
Single line speed ----- 76 m/min (at 4th layer)
Wire rope

Diameter x length ----- 8 mm x 74 m
Breaking strength ----- 43.1 kN {4.39 tf}
Construction ----- 7 x 7 + 6 x WS (26)
Hook block ----- 2 sheaves

HOOK BLOCK STOWING DEVICE

Hook-in (Mechanically stowed beneath boom top portion)

SLEWING Hydraulic motor driven Worm gear speed reduction
Continuous 360° full circle slewing on ball bearing slew ring
Automatic slewing lock

Slewing speed ----- 2.5 min⁻¹ {rpm}

Specifications are subject to change without notice.

OUTRIGGERS

Manually operated beams and hydraulically operated jacks

Integral with crane frame

Extension width ----- Min. 2,000 mm center to center

(2,150 mm outer to outer)

Mid. 2,900 mm center to center

(3,050 mm outer to outer)

Mid. 3,600 mm center to center

(3,750 mm outer to outer)

Max. 4,200 mm center to center

(4,350 mm outer to outer)

HYDRAULIC SYSTEM

Hydraulic pump ----- Single gear pump

Hydraulic motors ----- Axial piston type for winch

Axial piston type for slewing

Control valves ----- Multiple control valves with integral
safety valve

Oil tank capacity ----- Approx. 41.1 L

SAFETY DEVICES

Anti-two-block device

Boom angle indicator

Load indicator

Load meter

Hook safety latch

Spirit level

Hydraulic safety valves, check valves and holding valves

OPTIONAL EQUIPMENT

Emergency hydraulic pump

Outrigger pads

Oil cooler

Rear outriggers (outrigger beam extension type)

CRANE MASS

Approx. 1,360 kg

(Except crane options and munting parts.)

NOTE : Each operating speeds show the value when there is no load conditions and the pump delivery is the following conditions.

- 36 L/min (Slewing speed)

- 60 L/min (BOOM : Extending speed, Raising speed WINCH : Single line speed)

RATED LIFTING CAPACITIES (kg)

Table A

LOAD RADIUS	3.52 m / 5.75 m BOOM		LOAD RADIUS	7.95 m BOOM		
	CRANE STRENGTH	EMPTY CHASSIS		CRANE STRENGTH	EMPTY CHASSIS	
		extension width of outriggers			extension width of outriggers	
		MAX.			MAX.	
2.4 m and below	3,030	3,030	1,330	2.7 m and below	2,330	2,330
2.5 m	2,830	2,780	1,230	3.0 m	2,130	2,130
3.0 m	2,430	2,330	880	3.5 m	1,830	1,830
3.5 m	2,030	1,980	680	4.0 m	1,630	1,580
4.0 m	1,730	1,600	530	4.5 m	1,480	1,280
4.5 m	1,480	1,280	430	5.0 m	1,330	1,050
5.0 m	1,330	1,050	330	5.5 m	1,150	900
5.55 m	1,150	850	280	6.0 m	1,080	780
				6.5 m	980	650
				7.0 m	880	580
				7.75 m	750	480

LOAD RADIUS	10.12 m BOOM		LOAD RADIUS	12.3 m BOOM	
	CRANE STRENGTH	EMPTY CHASSIS		CRANE STRENGTH	EMPTY CHASSIS
		extension width of outriggers			extension width of outriggers
		MAX.			MAX.
4.0 m and below	1,230	1,230	4.5 m and below	930	930
5.0 m	980	980	5.0 m	830	830
6.0 m	830	780	6.0 m	700	700
7.0 m	730	580	7.0 m	600	580
8.0 m	650	450	8.0 m	500	450
9.0 m	580	380	9.0 m	450	380
9.92 m	530	330	10.0 m	400	300
			11.0 m	350	280
			12.1 m	330	230

Table C

LOAD RADIUS	3.52 m / 5.75 m BOOM			LOAD RADIUS	7.95 m BOOM				
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS			
		extension width of outriggers				extension width of outriggers			
		MAX.	MIN.			MAX.	MAX.		
2.4 m and below	3,030	3,030	1,580	2.7 m and below	2,330	2,330			
2.5 m	2,830	2,830	1,480	3.0 m	2,130	2,130			
3.0 m	2,430	2,430	1,080	3.5 m	1,830	1,830			
3.5 m	2,030	2,030	830	4.0 m	1,630	1,630			
4.0 m	1,730	1,730	650	4.5 m	1,480	1,430			
4.5 m	1,480	1,480	530	5.0 m	1,330	1,280			
5.0 m	1,330	1,330	430	5.5 m	1,150	1,130			
5.55 m	1,150	1,150	350	6.0 m	1,080	1,030			
				6.5 m	980	900			
				7.0 m	880	800			
				7.75 m	750	650			

LOAD RADIUS	10.12 m BOOM			LOAD RADIUS	12.3 m BOOM				
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS			
		extension width of outriggers				extension width of outriggers			
		MAX.	MAX.			MAX.	MAX.		
4.0 m and below	1,230	1,230		4.5 m and below	930	930			
5.0 m	980	980		5.0 m	830	830			
6.0 m	830	830		6.0 m	700	700			
7.0 m	730	730		7.0 m	600	600			
8.0 m	650	650		8.0 m	500	500			
9.0 m	580	530		9.0 m	450	450			
9.92 m	530	450		10.0 m	400	400			
				11.0 m	350	350			
				12.1 m	330	330			

Table D

LOAD RADIUS	3.52 m / 5.75 m BOOM			LOAD RADIUS	7.95 m BOOM				
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS			
		extension width of outriggers				extension width of outriggers			
		MAX.	MIN.			MAX.			
2.4 m and below	3,030	3,030	1,580	2.7 m and below	2,330	2,330			
2.5 m	2,830	2,830	1,480	3.0 m	2,130	2,130			
3.0 m	2,430	2,430	1,080	3.5 m	1,830	1,830			
3.5 m	2,030	2,030	830	4.0 m	1,630	1,630			
4.0 m	1,730	1,730	650	4.5 m	1,480	1,480			
4.5 m	1,480	1,480	530	5.0 m	1,330	1,330			
5.0 m	1,330	1,330	430	5.5 m	1,150	1,150			
5.55 m	1,150	1,150	350	6.0 m	1,080	1,080			
				6.5 m	980	980			
				7.0 m	880	880			
				7.75 m	750	750			

LOAD RADIUS	10.12 m BOOM			LOAD RADIUS	12.3 m BOOM				
	CRANE STRENGTH	EMPTY CHASSIS			CRANE STRENGTH	EMPTY CHASSIS			
		extension width of outriggers				extension width of outriggers			
		MAX.				MAX.			
4.0 m and below	1,230	1,230		4.5 m and below	930	930			
5.0 m	980	980		5.0 m	830	830			
6.0 m	830	830		6.0 m	700	700			
7.0 m	730	730		7.0 m	600	600			
8.0 m	650	650		8.0 m	500	500			
9.0 m	580	580		9.0 m	450	450			
9.92 m	530	530		10.0 m	400	400			
				11.0 m	350	350			
				12.1 m	330	330			


NOTE :

1. Empty Chassis Rated Capacities in these tables depend on condition that crane is set level on firm level ground.
2. This value includes the mass of lifting devices such as hook block (30kg).
3. When the outriggers are extended to the middle width, read the capacities rated for the minimum extension width.
4. Fully extend the front outriggers when working with a boom length exceeding 5.75m.
5. This load radius shows actual load radius which includes boom deflection.
6. If the boom length exceeds the table value even a little, the performance is limited to the performance of the next boom length.
7. When the boom length is 10.12 m, a half of the  mark on lateral face of the 4th boom section is exposed out of 3rd boom section.
8. Empty chassis rated lifting capacity varies according to the working area.
 - Front mounting <over-side, over-rear area> : 100%
 - <over-front area> : 25%
9. Empty Chassis Rated Capacities table A, C and D depend on the types of chassis.
(The following table shows guidelines for bodywork vehicles that can achieve the rated lifting capacity table A and C for vehicles. The rated lifting capacity may not be applicable depending on vehicle specifications. Be sure to carry out a stability inspection to determine which rated lifting capacity tables to apply.)


A	8.0 t \leq GVW $<$ 17.0 t
C	11.0 t \leq GVW $<$ 17.0 t, 4200 mm \leq WB (*1)


*1 : From the front axle to the farthest rear axle.

Extension mark

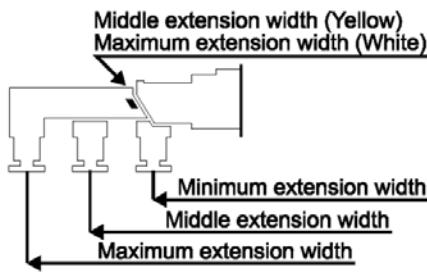


Front mounting

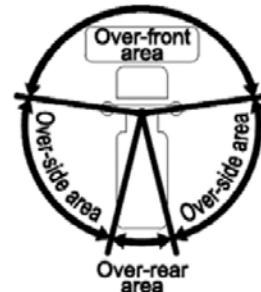

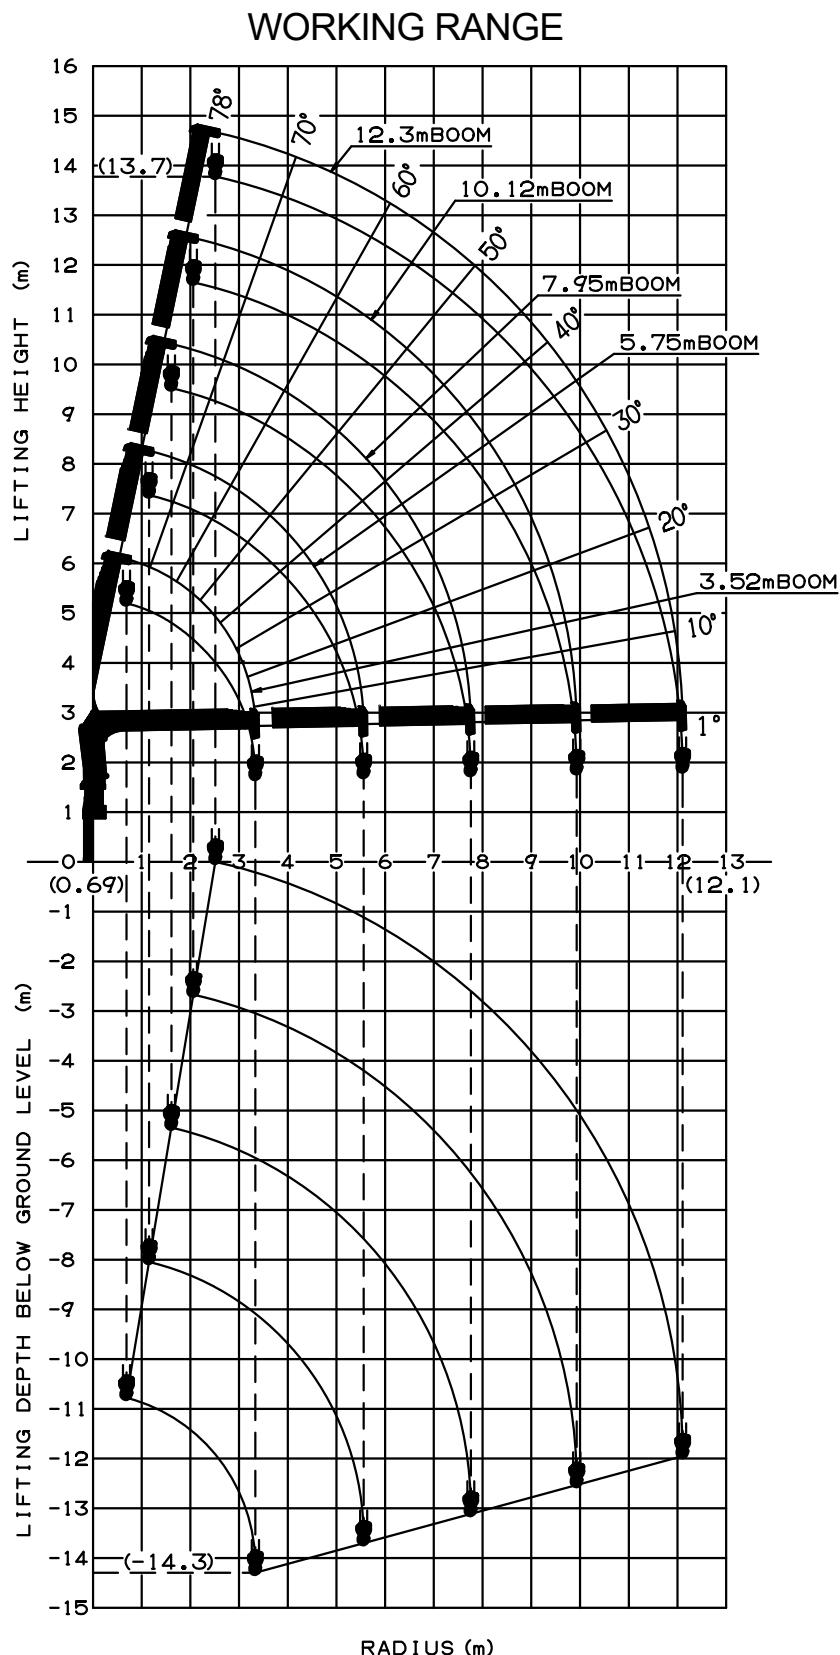

NOTE : The above lifting heights and boom angles are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.

DIMENSIONS

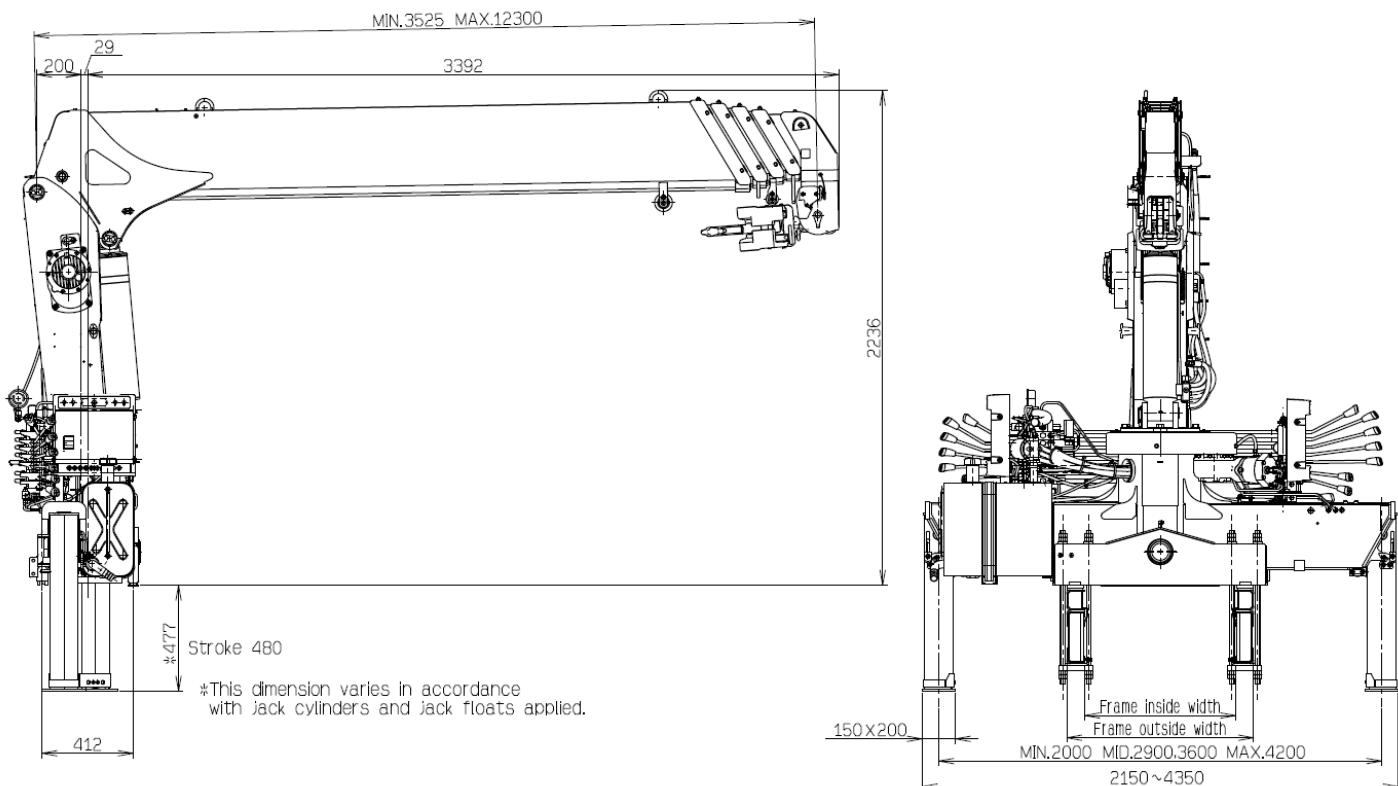

GENERAL DATA FOR SUITABLE TRUCKS

Even within range of this data, bodywork may not be possible depending on the specifications of the truck.

Gross vehicle weight	8,000 to 17,000 kg
P.T.O. torque	190 N·m {19.4 kgf·m} min.
P.T.O. revolution range of use (min. to max.)	Approx. 350 to 1,300 min ⁻¹ {rpm}
Width for crane mounting	Approx. 640 mm min.
Frame	Weight distribution and frame strength should be calculated for each truck
Frame width range (inside to outside)	Approx. 610 to 860 mm
Frame height (ground to chassis frame top) (**1)	Approx. 615 to 810 mm
Chassis frame section modulus (**2)	238 cm ³ min.

**1 Height of crane mounting surface is changed by crane bases.

**2 The chassis frame material must meet the following conditions at the crane mounting location.

— Yield point : 392 N/mm²

— Tensile strength : 540 N/mm²