
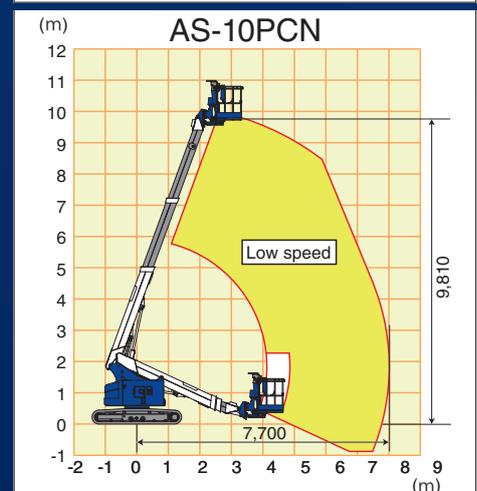


AS-10PC/N

(NUS10/N-7)

TELESCOPIC BOOM

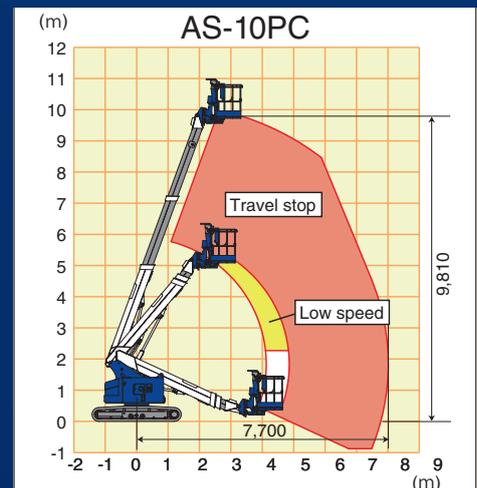

MODEL HIGHLIGHTS


- 360° continuous turntable rotation
- Low emission engine
- Full range traveling
- Low ground pressure
- Grey non-marking tracks

Model	AS-10PC/N
Max. platform capacity	200 kg
Platform size (L x W x H)	1,130 x 730 x 1,000 mm
Max. platform height	9.8 m
Max. outreach	7.7 m

Model		AS-10PC / AS-10PCN
SPECIFICATIONS		
Max. platform height	9.8 m	
Max. outreach	7.7 m	
Allowable tilt	5°	
Max. platform capacity	200 kg	
Platform size (L x W x H)	1,130 × 730 × 1,000 mm	
Platform rotation	L90° ~ R45°	
Transport dims (L x W x H)	6,120 × 2,050 × 2,280 mm	
Machine weight *(w/pad)	5,970 (5,970) kg	
Main boom length	4.05 m ~ 8.35 m	
Elevation	-20° ~ 70°	
TRAVEL		
Travel speeds	0.7 / 1.3 / 2.3 km/h	
Max. ground pressure	141 kPa	
Travel position ground pressure	42 kPa	
Max. gradeability	57% (30°)	
Turning radius outside (spin turn)	1.75 m	
POWER SOURCE		
Engine type	KUBOTA D1105	
Rated power	14.4 kW / 2,400 min ⁻¹	
Fuel tank capacity	41 L	
SAFETY DEVICES		
	AS-10PC	AS-10PCN
Emergency stop	✓	✓
Foot switch / Enabling switch	✓	✓
Preventive malfunction device (at engine start)	✓	✓
Auxiliary lowering control	✓	✓
Traveling stop	✓	
Traveling restriction (on slope)	✓	✓
Operation restriction (on slope)	✓	✓
Overload sensing system	✓	✓
Battery isolator switch	✓	✓

* Machine weight includes specified value of fuel, lubricating oil, hydraulic oil, and coolant.

DIMENSIONS (mm)

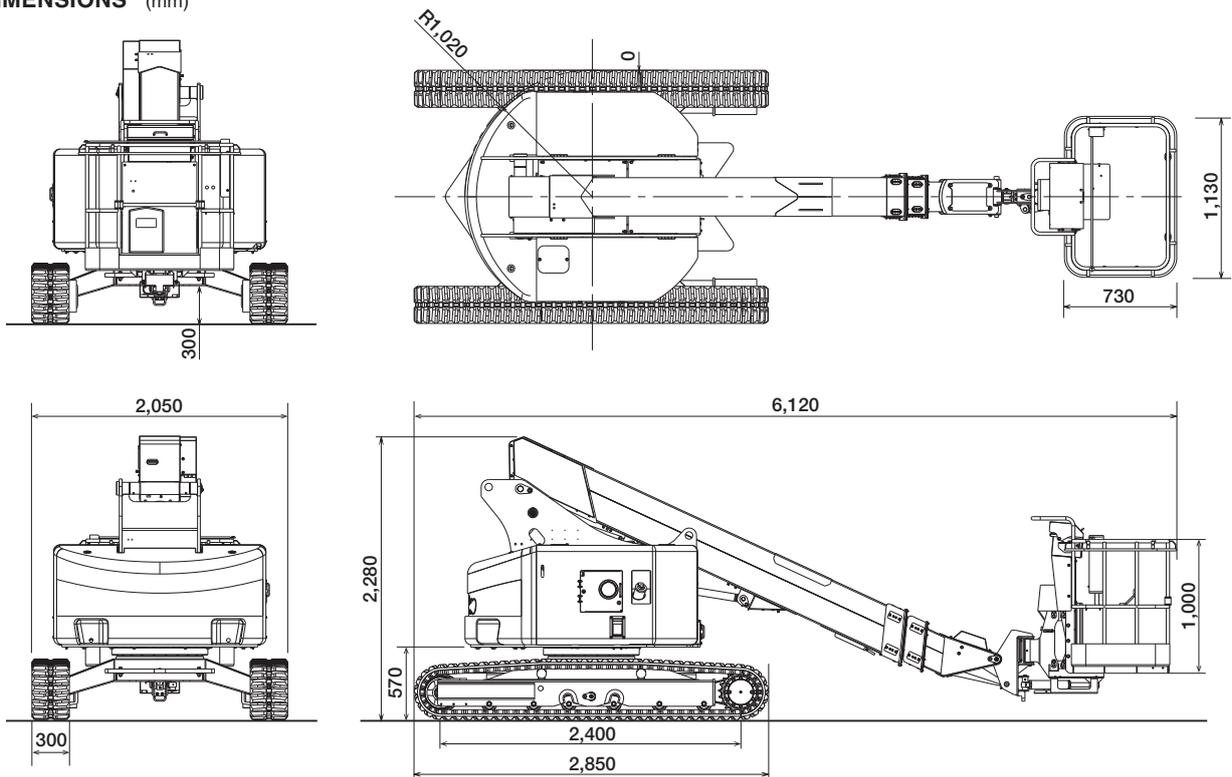

For all our types:



January 2026. Unless otherwise specified, all information in this brochure refers to a standard equipment, and it is intended as general information only. No liability is assumed. Errors reserved. Product specifications and prices are subject to changes without notice. The photographs and/or drawings in this brochure are for illustrative purposes only. For correct and safe operation, the original operating manual and lifting capacity charts are essential. Failure to follow the corresponding Operator's Manual when using our equipment or failure to otherwise act responsibly may result in property damage, serious injury or death. The sole warranty applicable with respect to our equipment is the standard warranty as per general terms and conditions of sales and service (ask your local Tadano dealer for details), and Tadano makes no other warranty, express or implied. All rights reserved. Any use of the trademarks, logos, brand names and model names used herein is prohibited.

Tadano Ltd.

Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan

Phone: +81-3-6811-7309

info@tadano.com www.tadano.com

Reaching new heights