

PM 18025 SP

elevate to the highest power





Super-equipped as standard, the **PM 18 SP** is one of the top series in the medium range. The crane stands out for the modernity of its design, its consequent versatility of use and the immediate return on investment.

MAXIMUM LIFTING MOMENT	15,0 TM
HYDRAULIC OUTREACH	
Horizontal	14,50 m
Vertical	18,45 m
HYDRAULIC SYSTEM	
Recommended oil flow	80 l/min
Max. pressure	30,5MPa
Tank capacity	150 l
SLEWING SYSTEM	
Slewing angle	400°
Slewing torque	19,7 kNm
STABILISATION	
Spread available	5,1 - 6,6 m
Interlock available	1 - 3 - 4 - 5
Stabiliser control	Radio Wireless
STANDARD CRANE WEIGHT	
With empty tank	2320 kg




DIMENSIONS

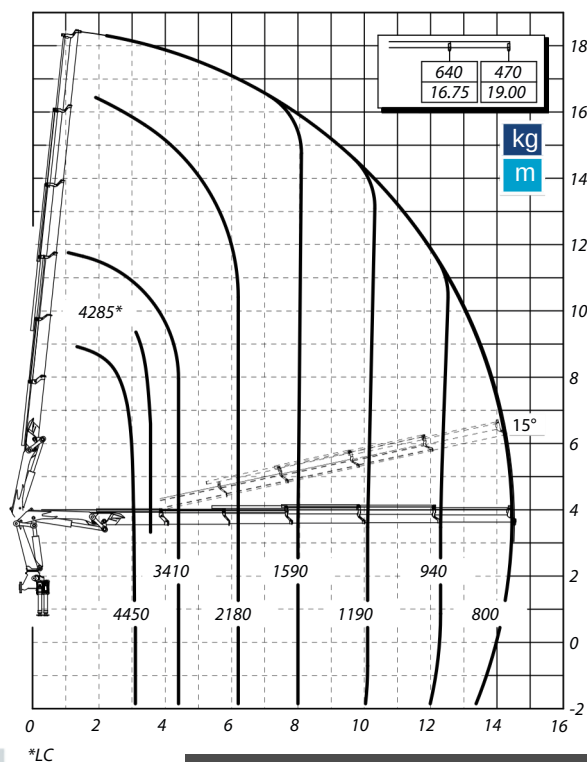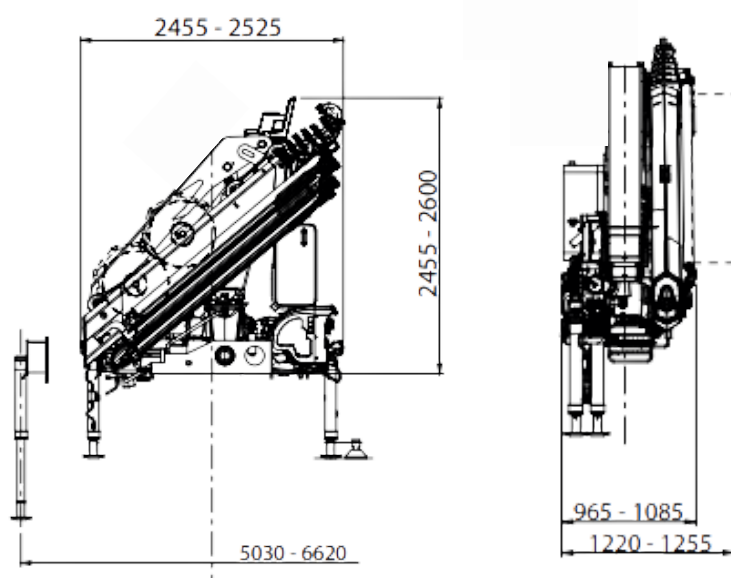

STANDARD EQUIPMENT



LIFTING CAPACITIES



*All technical data, descriptions and illustrations are purely indicative and subject to change at PM Oil&Steel own discretion and without notice.



Innovation meets mid-range muscle.

The 18 SP sets a new standard in the mid-capacity class, combining high-performance tech with a compact, versatile design. Key features include a compensated hydraulic distributor, multifunction radio control with display, and the Plus system for enhanced lifting power and smooth operation. Power Tronic ensures real-time control, while the double connecting rod system delivers consistent performance. Available in an LC version for tight spaces, the 18 SP offers up to seven hydraulic extensions (19.05 m horizontal, 22.95 m vertical reach) with optional fly jibs on selected models for even greater flexibility.

OPTIONAL



Jib



Air/oil heat exchanger



Manual extensions



LC configuration



Slewing limitation
with variable
calibration



Hose reel



Hydraulic winch on jib



Electro-hydraulic
slewing limiter



Safety Kit for
outriggers



Hose racks



Hydraulic winch on
crane



Hydraulic flip-up
outriggers



Slewing limiter valve
kit