


# CM350

## SERIES PRODUCT GUIDE

35 TON (32 MT) TELESCOPIC CRANE



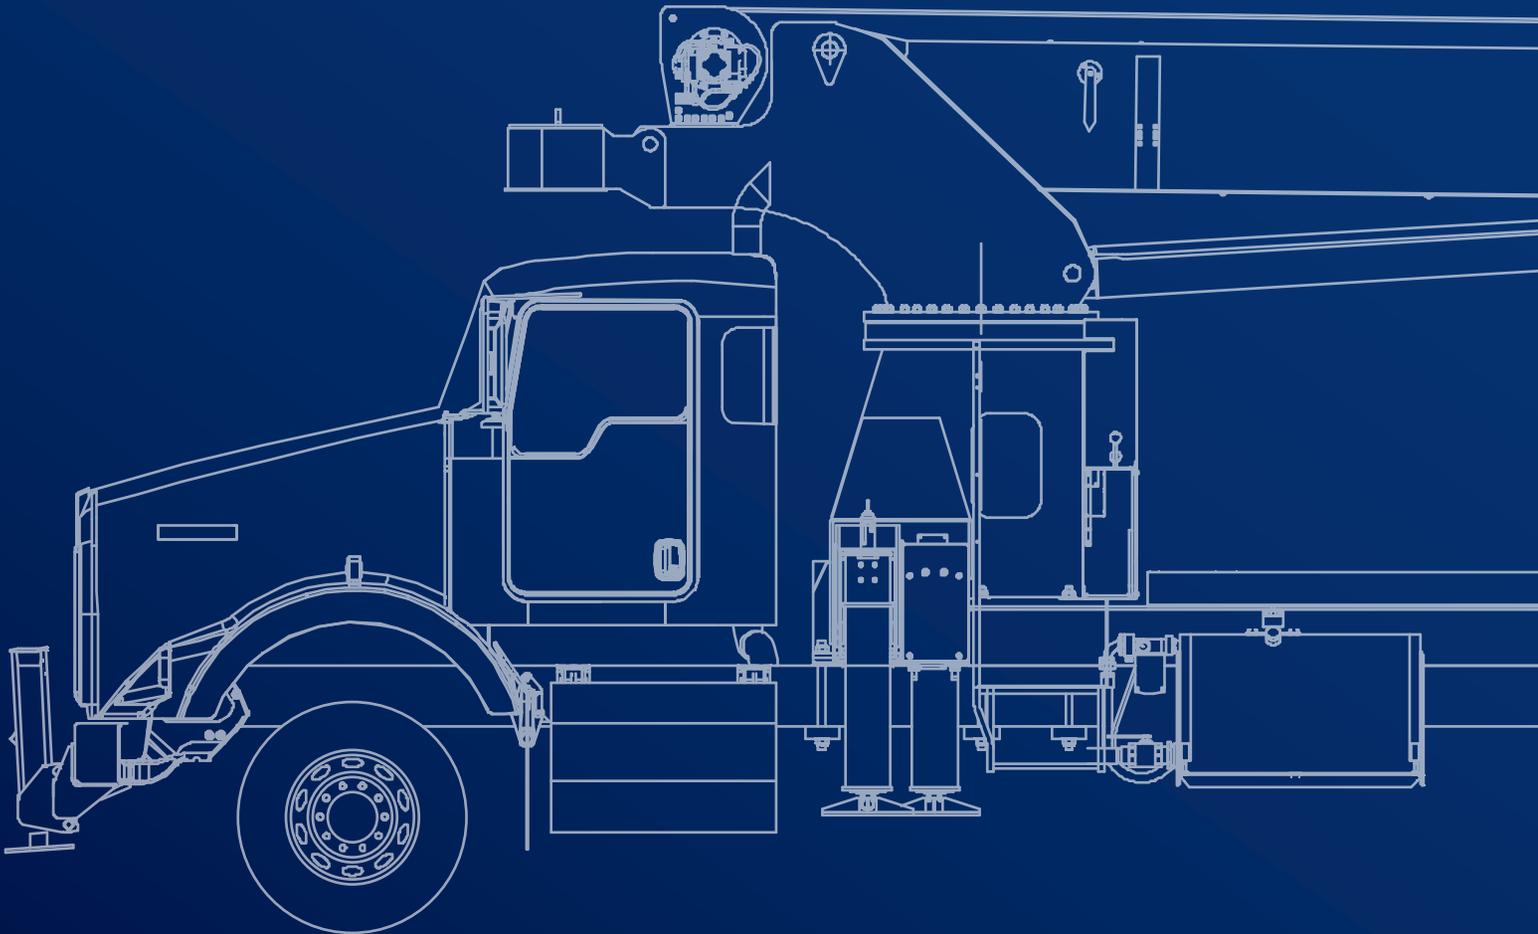

January 2026. Unless otherwise specified, all information in this brochure refers to a standard crane equipment, and it is intended as general information only. No liability is assumed. Errors reserved. Product specifications and prices are subject to changes without notice. The photographs and/or drawings in this brochure are for illustrative purposes only. For correct and safe crane operation, the original operating manual and lifting capacity charts are essential. Failure to follow the corresponding Operator's Manual when using our equipment or failure to otherwise act responsibly may result in property damage, serious injury or death. The sole warranty applicable with respect to our equipment is the standard warranty as per general terms and conditions of sales and service (ask your local Tadano dealer for details), and Tadano makes no other warranty, express or implied. All rights reserved. Any use of the trademarks, logos, brand names and model names used herein is prohibited.

© Tadano Ltd. 2026

# Contents



Chassis Data .....	6-7
Outrigger Extension .....	8
Area of Operation .....	9
Reeving Diagram .....	9
35100C Load Chart: Main Boom and Jib .....	12
35100C Boom Diagram .....	13
35124C Load Chart: Main Boom and Jib .....	14
35124C Boom Diagram .....	15
LMI Operating Codes .....	16
Technical Description .....	18-19
Technical Description – Options .....	20-21

# Key



Operator aids



Cab



Heating / Air conditioning



Controls



Hoist speed



1 - Main hoist      2 - Auxiliary winch  
3 - Recovery winch



Rope length



Rope – Standard / optional



Rope diameter



Permissible line pull



Maximum line pull



Slewing / Allowable slewing range



Slewing gears



Slewing brake



Outriggers / Lifting on outriggers



2-person man basket



Counterweight



Radio remote control



Hook block



Distance from hook to head sheave pin



Hook and ball



Hydraulics



Boom elevation angle



Max. boom length with extension



Boom with extension retracted



Boom angle



Telescoping mode



Working radius



Boom length



Hydraulic actuated boom



Full power mechanical synchronized



Boom head / Hook block dimension




Main boom with auxiliary head




Tip height

# CM 350

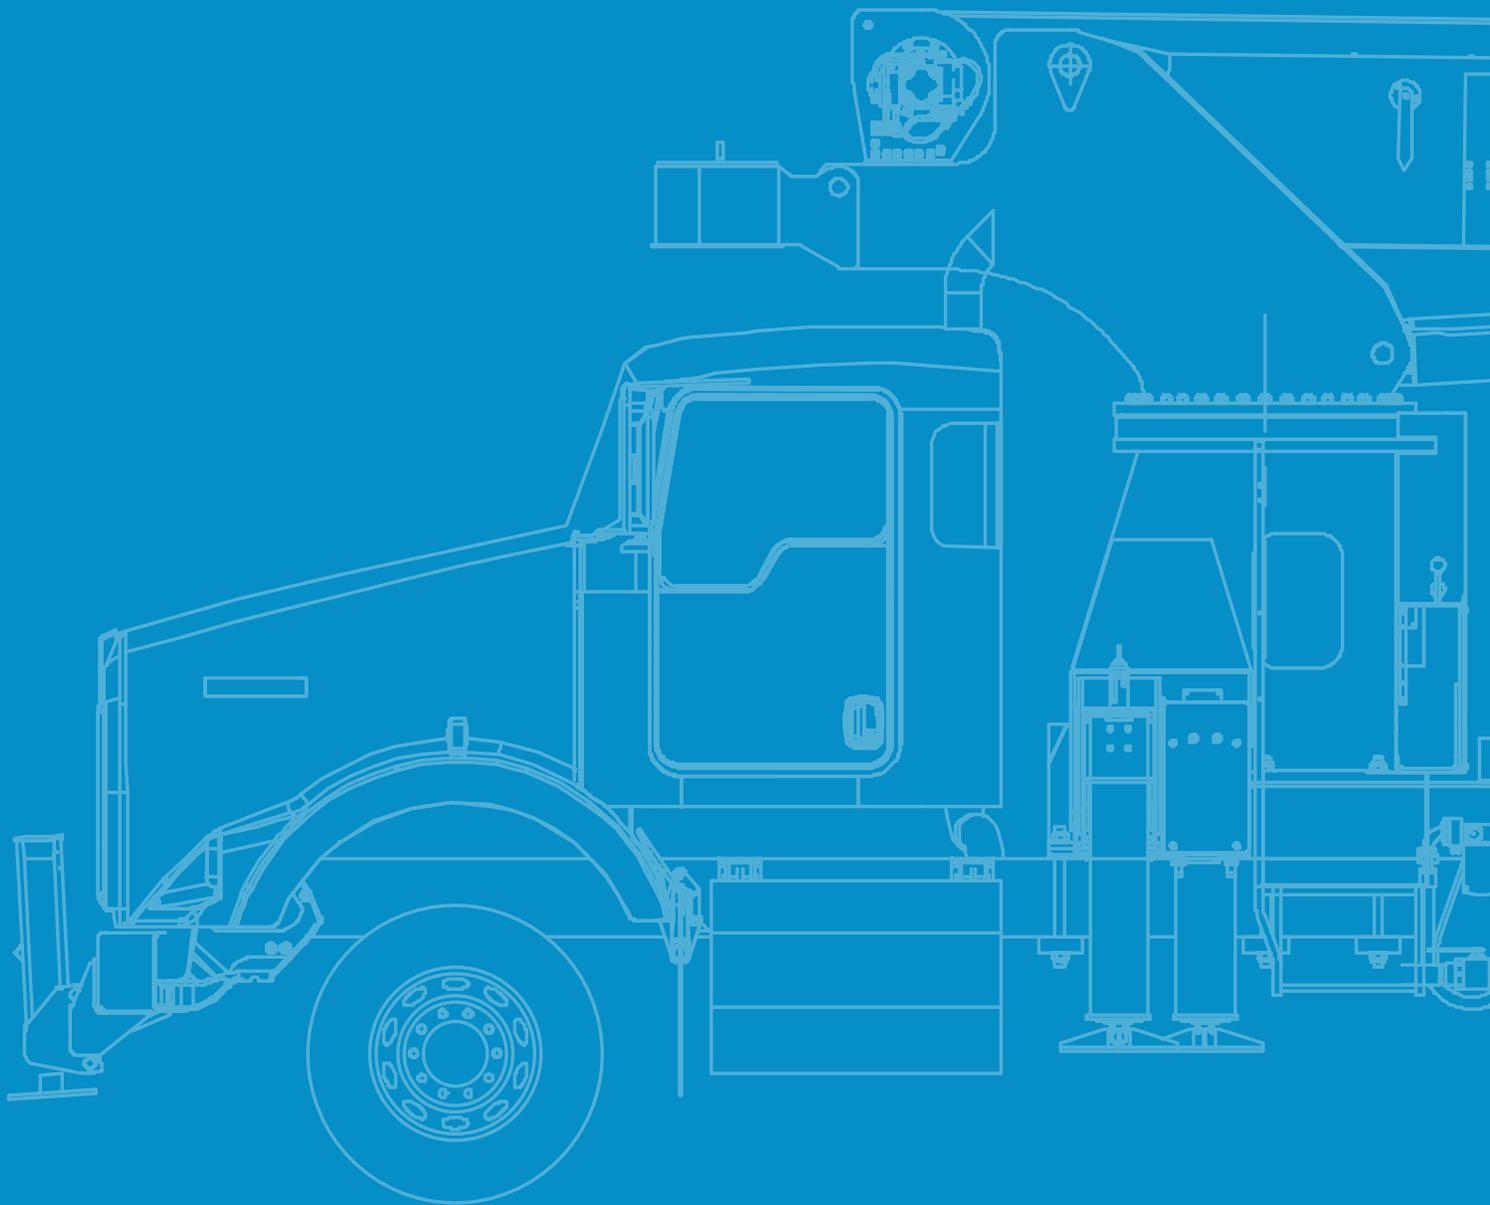

# 35100C Chassis Data

## Dimensions

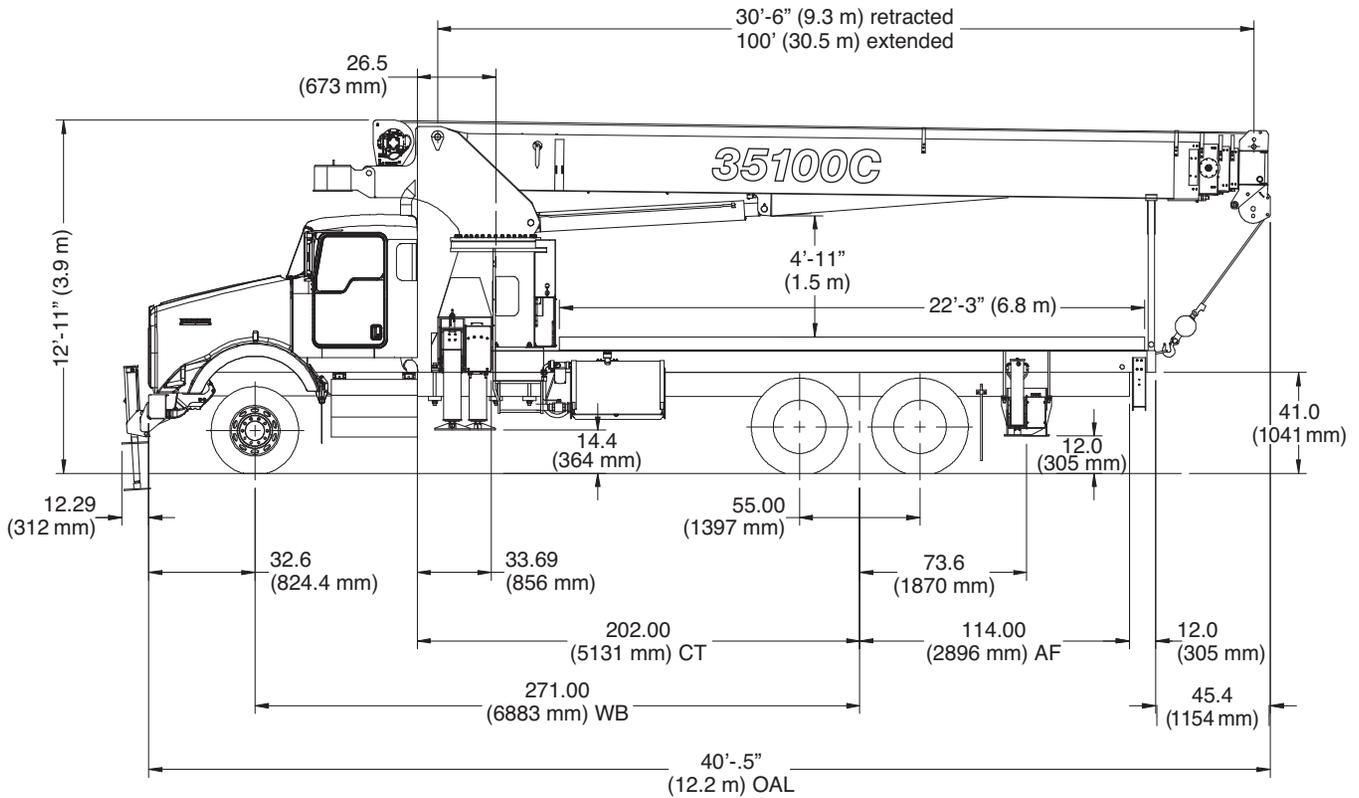

### Chassis Data

Model	35100C
Wheelbase (WB)	271 in. (6,883 mm)
Cab to tandem (CT)	202 in. (5,131 mm)
After frame (AF)	114 in. (2,896 mm)
Nominal frame width	34 in. (864 mm)
Frame section modulus at 180° / 360° area of operation*	30 in <sup>3</sup> (491.6 cm <sup>3</sup> ) 125,000 psi · 861,875 kPa

\* Frame selection modulus at 360° area of operation requires front bumper stabilizer.

### Truck Axle Weight

Front axle gross weight rating	20,000 lbs (9,072 kg)
Rear axle gross weight rating	40,000 lbs (18,144 kg)
Min. truck axle weight – Front**	8,450 lbs (3,833 kg)
Min. truck axle weight – Rear**	8,300 lbs (3,765 kg)

\* Minimum chassis weight is required to meet 85% stability requirements.  
Chassis data is general – not for engineering. Some dimensions depend on truck selection.

### Crane Weight

Model	35100C
Total crane (standard)	29,580 lbs (13,417 kg)
22 ft (6.7 m) Flatbed weight	1,980 lbs (898 kg)


#### Notes:

Additional axles required for federal bridge legal configuration – consult Tadano.  
Tadano highly recommends addition of a front stabilizer and may be required on some installations – consult Tadano.

Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# 35124C Chassis Data

## Dimensions

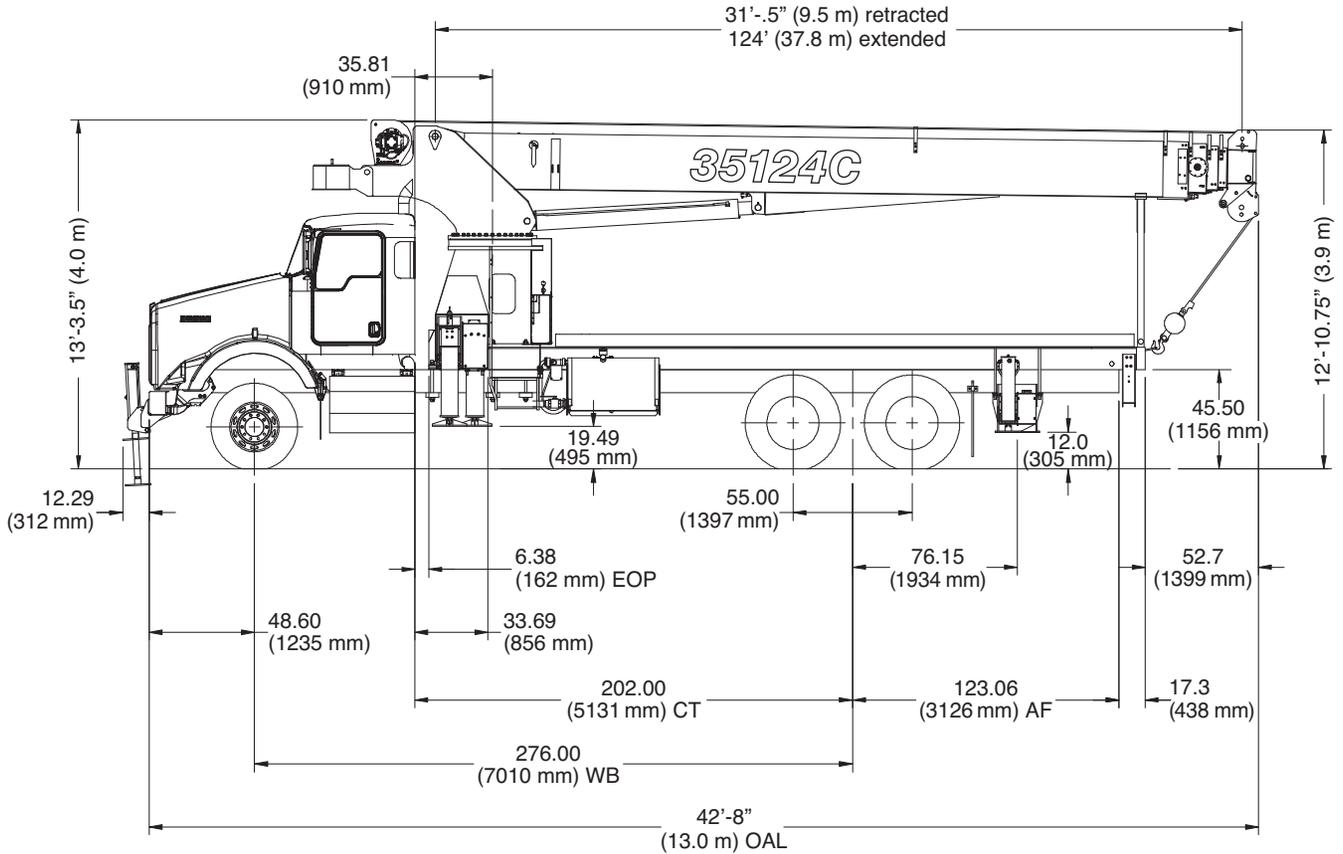

### Chassis Data

Model	35124C
Wheelbase (WB)	276 in. (7,010 mm)
Cab to tandem (CT)	202 in. (5,131 mm)
After frame (AF)	123.06 in. (3,126 mm)
Nominal frame width	34 in. (864 mm)
Frame section modulus at 180° / 360° area of operation*	30 in <sup>3</sup> (491.6 cm <sup>3</sup> ) 125,000 psi · 861,875 kPa

\* Frame selection modulus at 360° area of operation requires front bumper stabilizer.

### Truck Axle Weight

Front axle gross weight rating	20,000 lbs (9,072 kg)
Rear axle gross weight rating	40,000 lbs (18,144 kg)
Min. truck axle weight – Front**	8,450 lbs (3,833 kg)
Min. truck axle weight – Rear**	8,300 lbs (3,765 kg)

### Crane Weight

Model	35124C
Total crane (standard)	32,260 lbs. (14,633 kg)
22 ft (6.7 m) Flatbed weight	1,980 lbs (898 kg)


#### Notes:

Additional axles required for federal bridge legal configuration – consult Tadano.  
Tadano highly recommends addition of a front stabilizer and may be required on some installations – consult Tadano.


Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# Outrigger Extension

**Outrigger Stabilizer Combination – Fully Extended (optional)**

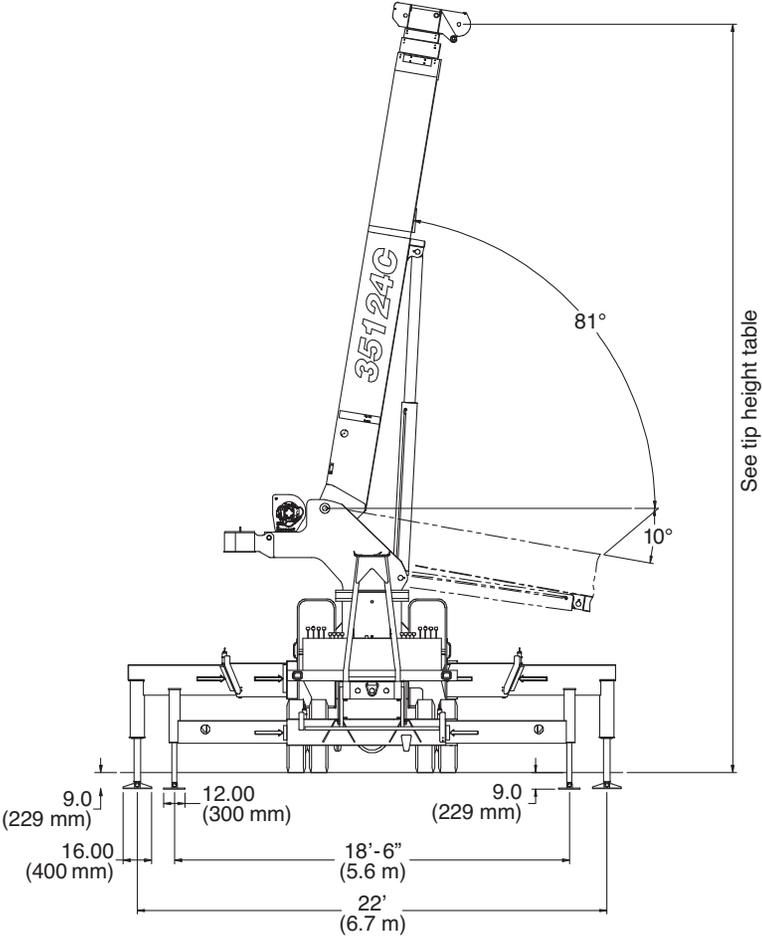


**Outrigger Stabilizer Combination – Intermediate Extended**

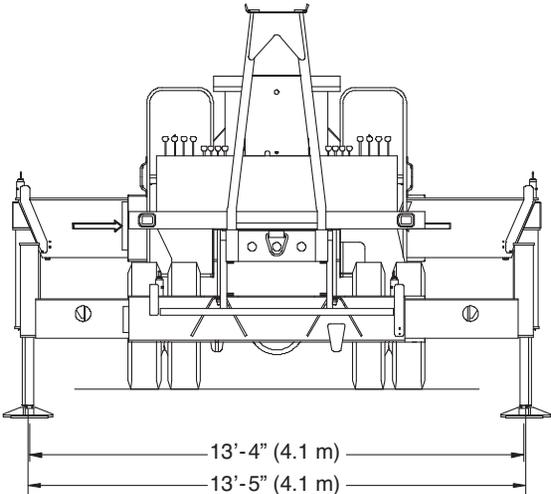

Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# Area of Operation · Reeving Diagram

## Area of Operation

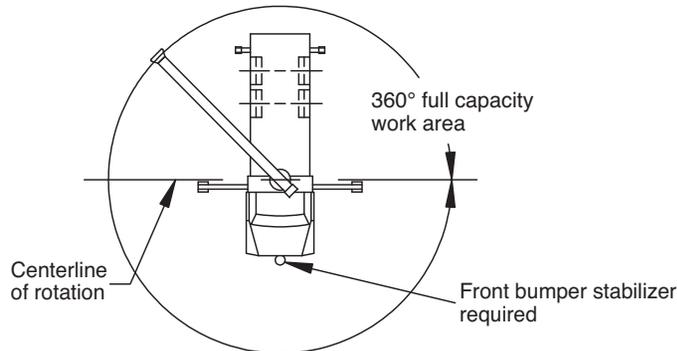

## Deductions from rated loads for load handling devices supplied by Tadano

Auxiliary block	50 lbs (22.7 kg)
Auxiliary sheave	50 lbs (22.7 kg)
Overhaul ball	See overhaul ball mfgr. nameplate
Load blocks	See block mfgr. nameplate
Hose reel	260 lbs (117.9 kg)
Swing-around jib	See load chart


**WARNING:** Lifting off the main boom point while the jib is erected is not intended nor approved.

## Reeving Diagram

Allowable Line Pull								WARNING
1 part line	2 part line	3 part line	4 part line	5 part line	6 part line	7 part line	8 part line	<b>Anti-Two-Block System must be in good operating condition before operating crane.</b>  <b>Refer to the owner's manual.</b>  <b>Keep at least 3 wraps of load line on the drum at all times.</b>
9,080 lbs	18,160 lbs	27,240 lbs	36,320 lbs	45,400 lbs	54,480 lbs	63,560 lbs	70,000 lbs	
9,500 lbs	19,000 lbs	28,500 lbs	38,000 lbs	47,500 lbs	57,000 lbs	66,500 lbs	70,000 lbs	5/8" rot resistant (5.0 : 1 SF) 45,400 lbs min. breaking strength  5/8" 6 x 25 IWRC (3.5 : 1 SF) 33,250 lbs min. breaking strength



# CM 350

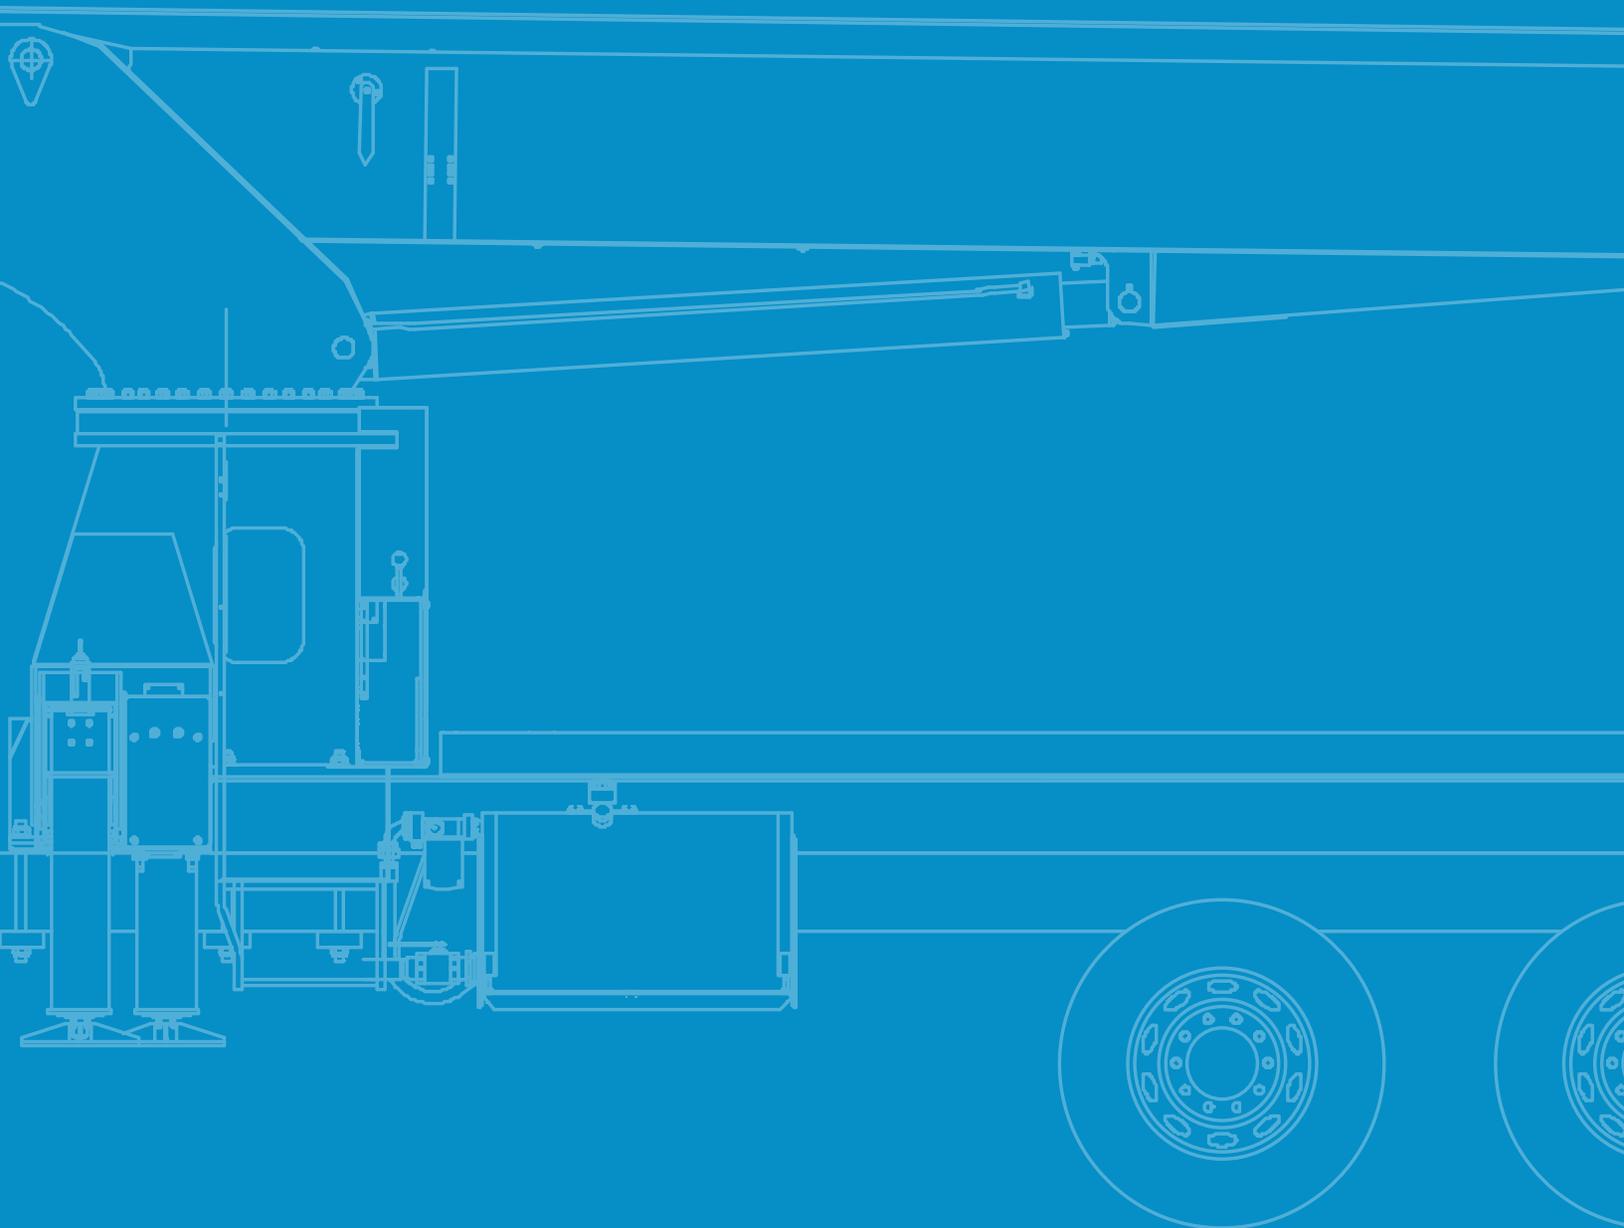

# 35100C Load Chart

# Main Boom Jib

30.5 ft – 100 ft – 4 section Jib		30.5 ft – 55 ft		360° non-continuous		22 ft (6.7 m) Outriggers		18.4 ft (5.6 m) Stabilizers						
30.5 ft		52 ft (A)		68 ft (B)		84 ft (C)		100 ft (D)		Fixed Jib		Telescopic Jib		
ft	°	lbs	°	lbs	°	lbs	°	lbs	ft	°	lbs	°	lbs	
6	80	70,000	-	-	-	-	-	-	6	-	-	-	-	
8	76	53,500	-	-	-	-	-	-	8	-	-	-	-	
10	72	45,670	-	-	-	-	-	-	10	-	-	-	-	
12	68	39,830	78	31,500	-	-	-	-	12	-	-	-	-	
15	61	33,660	75	30,330	79	28,500	-	-	15	-	-	-	-	
20	49	24,380	69	23,790	75	22,580	79	21,780	80	14,000	-	-	-	
25	33	18,310	62	18,810	70	18,470	75	17,690	78	13,500	-	-	-	
30	-	-	56	14,700	65	14,850	71	14,760	75	13,000	79	7,300	79	7,000
35	-	-	48	11,350	60	11,530	67	11,630	72	11,170	77	7,100	77	6,800
40	-	-	40	8,910	55	9,070	63	9,170	69	9,240	75	6,800	75	6,670
45	-	-	29	7,120	50	7,290	59	7,380	66	7,440	73	6,450	73	6,060
50	-	-	-	-	43	5,930	55	6,020	62	6,080	71	5,900	71	5,510
55	-	-	-	-	36	4,860	51	4,950	59	5,000	68	5,200	68	4,790
60	-	-	-	-	27	3,990	46	4,080	55	4,140	65	4,330	65	3,920
65	-	-	-	-	12	3,280	40	3,370	51	3,430	63	3,610	63	3,200
70	-	-	-	-	-	-	34	2,770	47	2,830	60	3,010	60	2,600
75	-	-	-	-	-	-	27	2,270	43	2,320	57	2,500	57	2,090
80	-	-	-	-	-	-	15	1,830	38	1,880	55	2,060	55	1,650
85	-	-	-	-	-	-	-	-	33	1,500	52	1,680	52	1,260
90	-	-	-	-	-	-	-	-	26	1,170	49	1,350	49	930
95	-	-	-	-	-	-	-	-	17	870	45	1,050	45	630
100	-	-	-	-	-	-	-	-	-	-	42	790	-	-
105	-	-	-	-	-	-	-	-	-	-	38	550	-	-
110	-	-	-	-	-	-	-	-	-	-	-	-	53	1,010
													50	770
													47	560

## Deductions from main boom capacities for stowed jibs

	600 lbs	350 lbs	270 lbs	220 lbs	180 lbs
<b>SFJ</b>	600 lbs	350 lbs	270 lbs	220 lbs	180 lbs
<b>STJ</b>	900 lbs	530 lbs	400 lbs	330 lbs	290 lbs

**SFJ** = Stowed fixed jib · **STJ** = Stowed telescopic jib

↑	Structural
↓	Stability


### NOTES:

- All loads rated at 360° pick
- Loads based on crane on fully extended outriggers and stabilizers
- All “on outriggers” loads are based on 85% tipping
- Loads above heavy line are based on structural rating
- Loads below heavy line are based on stability rating

Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# 35100C Boom Diagram

# Main Boom Jib

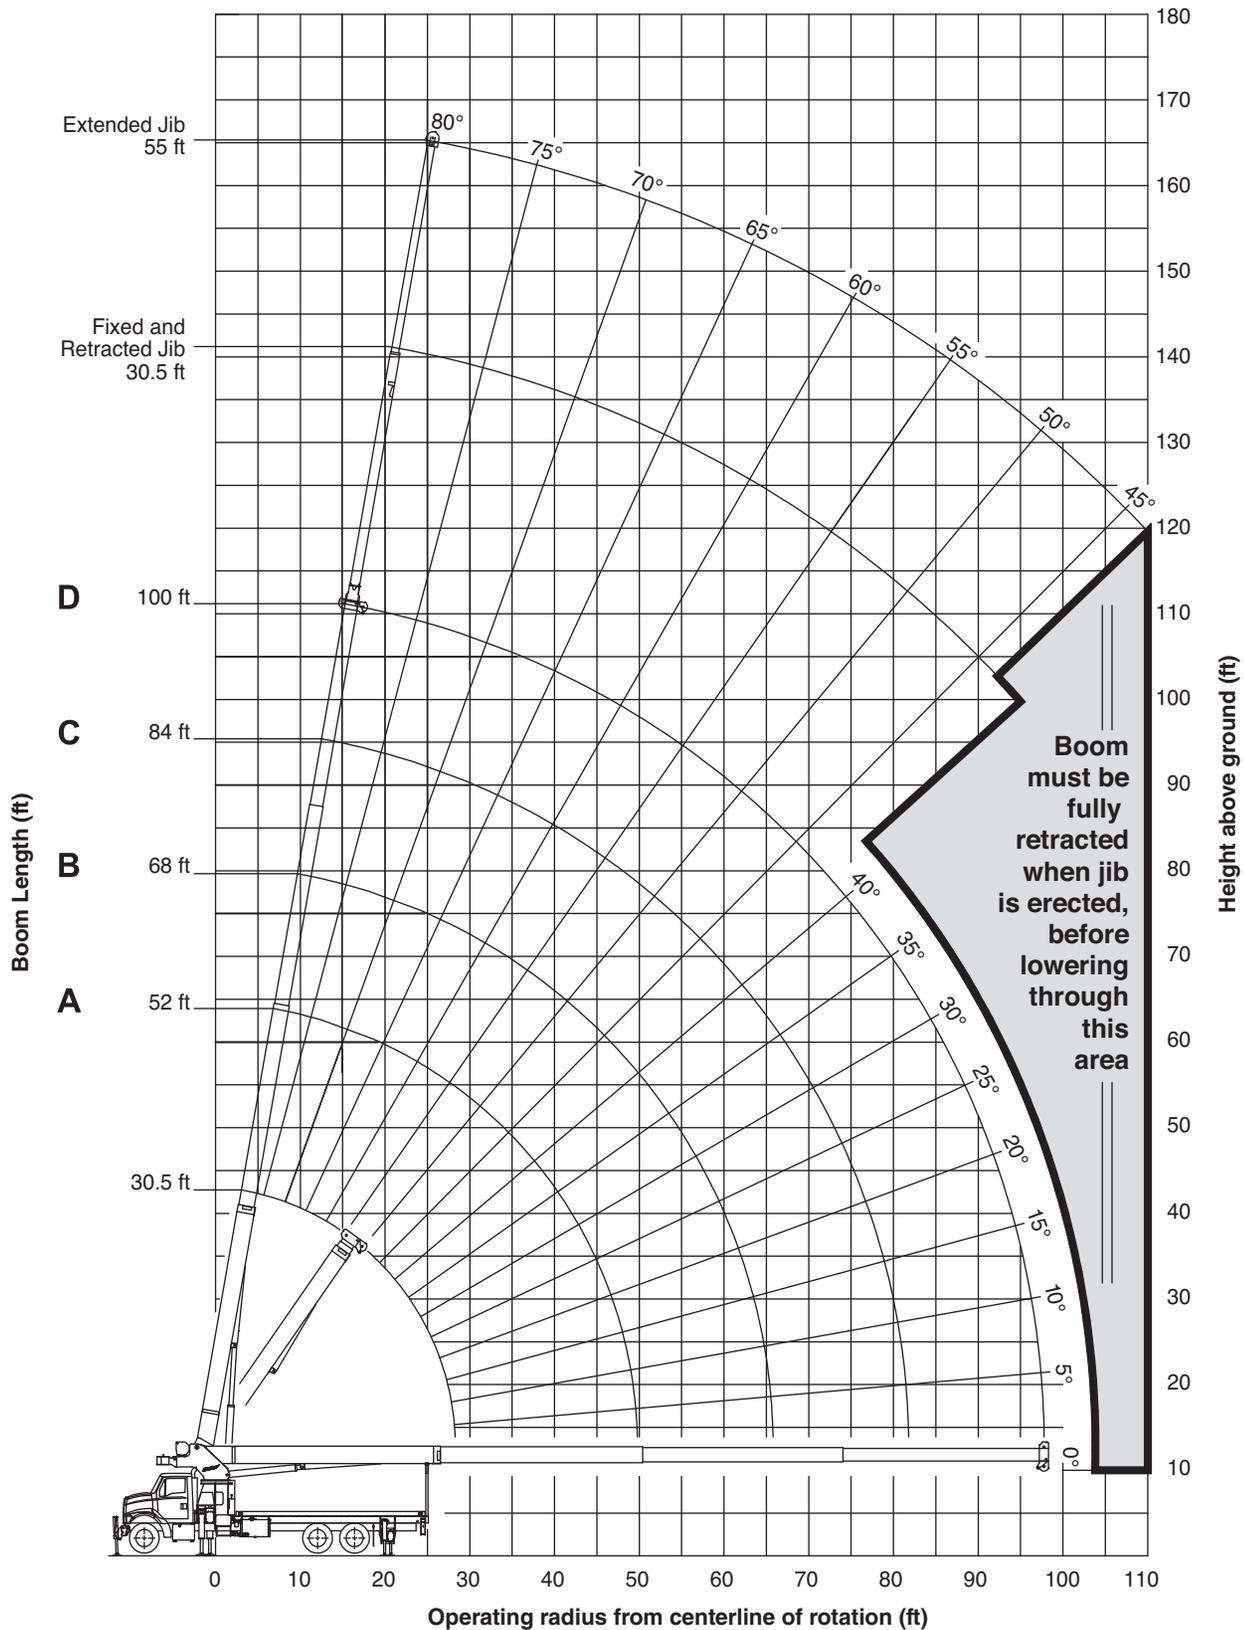

Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# 35124C Load Chart

# Main Boom Jib

 31 ft – 123.7 ft – 5 section Jib 31 ft
  360° non-continuous
  22 ft (6.7 m) Outriggers
  18.4 ft (5.6 m) Stabilizers

						Fixed Jib						
31 ft		58 ft (A)		80 ft (B)		102 ft (C)		123.7 ft (D)		31 ft		
ft	°	lbs	°	lbs	°	lbs	°	lbs	ft	°	lbs	
6	81	70,000	-	-	-	-	-	-	6	-	-	
8	76	53,390	-	-	-	-	-	-	8	-	-	
10	72	45,380	-	-	-	-	-	-	10	-	-	
12	68	39,420	79	25,000	-	-	-	-	12	-	-	
15	61	33,110	76	25,000	81	21,500	-	-	15	-	-	
20	49	23,710	71	22,870	78	19,700	81	14,500	20	-	-	
25	34	17,680	65	18,280	74	17,420	79	13,500	81	8,450	-	
30	-	-	60	14,150	70	14,320	76	12,820	79	8,150	-	
35	-	-	53	11,080	66	11,270	73	11,370	76	7,800	-	
40	-	-	47	8,590	62	8,770	69	8,870	74	7,280	-	
45	-	-	39	6,780	57	6,960	66	7,050	72	6,780	-	
50	-	-	29	5,400	52	5,580	63	5,660	69	5,710	-	
55	-	-	13	4,320	47	4,490	59	4,570	66	4,620	-	
60	-	-	-	-	42	3,620	56	3,700	64	3,740	-	
65	-	-	-	-	36	2,890	52	2,970	61	3,020	-	
70	-	-	-	-	28	2,290	48	2,370	58	2,410	-	
75	-	-	-	-	18	1,770	44	1,850	55	1,900	-	
80	-	-	-	-	-	-	39	1,410	52	1,450	-	
85	-	-	-	-	-	-	34	1,030	49	1,070	-	
90	-	-	-	-	-	-	28	690	45	730	-	
95	-	-	-	-	-	-	-	-	95	55	750	

## Deductions from main boom capacities for stowed jibs

SJ	450 lbs	240 lbs	180 lbs	140 lbs	120 lbs

SJ = Stowed jib

↑	Structural
↓	Stability


### NOTES:

- All loads rated at 360° pick
- Loads based on crane on fully extended outriggers and stabilizers
- All "on outriggers" loads are based on 85% tipping
- Loads above heavy line are based on structural rating
- Loads below heavy line are based on stability rating

Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# 35124C Boom Diagram

# Main Boom Jib

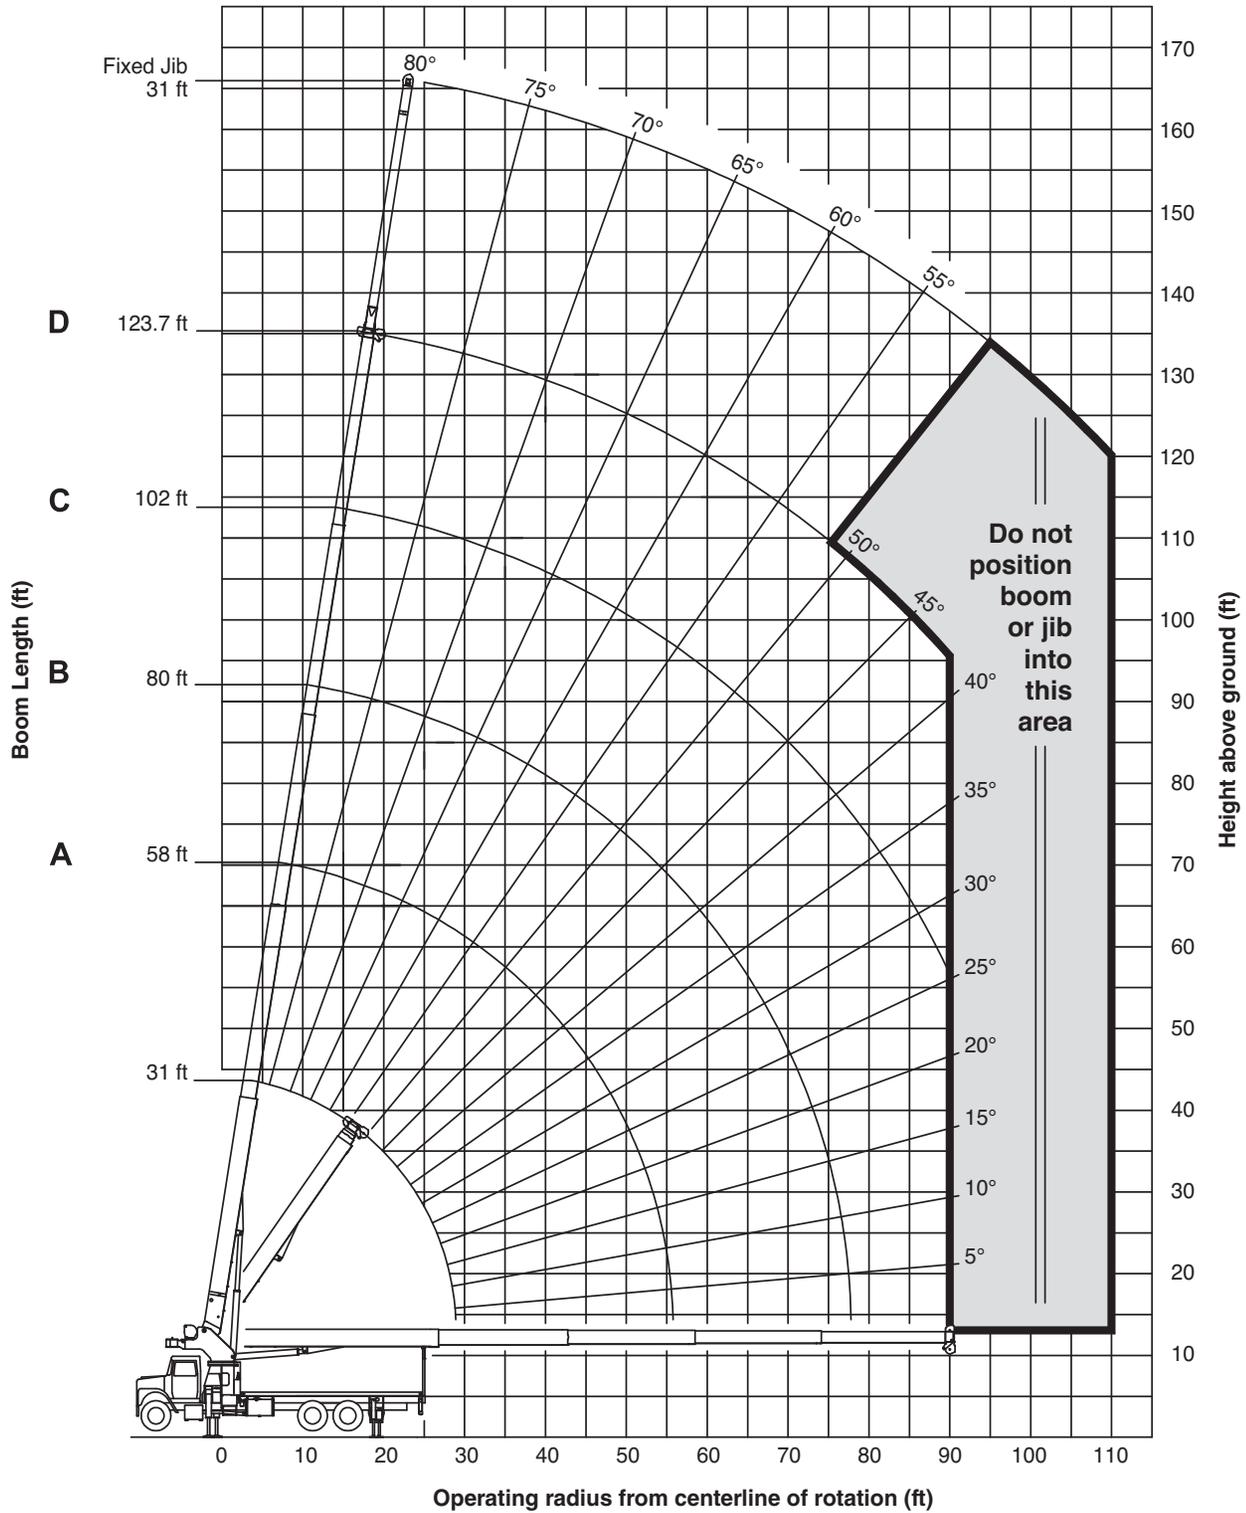

Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# LMI Operating Codes

LMI Operating Codes		
Code	Crane Configuration	Outrigger Configuration
1	Main boom	Fully extended
2	Fixed jib	Fully extended
3	Telescopic jib – Retracted	Fully extended
4	Telescopic jib – Extended	Fully extended
5	Personnel lifting platform on main boom	Fully extended
6	Personnel lifting platform on fixed jib	Fully extended
7	Personnel lifting platform on telescopic jib – Retracted	Fully extended
8	Personnel lifting platform on telescopic jib – Extended	Fully extended
9	Main boom	Intermediate
10	Fixed jib	Intermediate
11	Telescopic jib – Retracted	Intermediate
12	Telescopic jib – Extended	Intermediate

## WARNING


1. The operator must read and understand the owner’s manual before operating the crane.
2. Positioning or operation of crane beyond areas shown on these charts is not intended or approved except where specified in owner’s manual.
3. Loaded boom angles at specified boom lengths give only an approximation of the operating radius. The boom angle before loading should be greater to account for deflections. Do not exceed the operating radius for rated loads.
4. The operating radius shown in the jib rating chart is for fully extended boom only. When boom is not fully extended, use only loaded boom angle to determine load rating of jib.
5. For boom angles not shown on jib load rating chart, use rating of next lower boom angle.
6. For boom lengths not shown, use rating of next shorter or longer boom length, whichever is less. For radii not shown, use rating of next longer radius.
7. Crane load ratings on outriggers are based on freely suspended loads with the machine leveled and standing on a firm uniform supporting surface. No attempt shall be made to move a load horizontally on the ground in any direction.
8. Practical working loads depend on supporting surface, wind, and other factors affecting stability such as hazardous surroundings, experience of personnel, and proper handling, all of which must be taken into account by the operator.
9. The maximum load which may be telescoped is limited by hydraulic pressure, boom angle, and boom lubrication. It is safe to attempt to telescope any load within the limits of the load rating chart.
10. Lifting off the main boom point while the swing around jib is erected is not intended or approved.
11. 360° area of operation is only valid with the use of a front bumper stabilizer.

## DEFINITIONS

1. Operating radius is the horizontal distance from the axis of rotation to the center of the vertical hoist line or tackle with load applied.
2. Loaded boom angle as shown in the column head, is the included angle between the horizontal and longitudinal axes of the boom base after lifting rated load at rated radius.

Data published herein is intended as a guide only. Crane operation is subject to machine specific load charts and information.

# CM 350

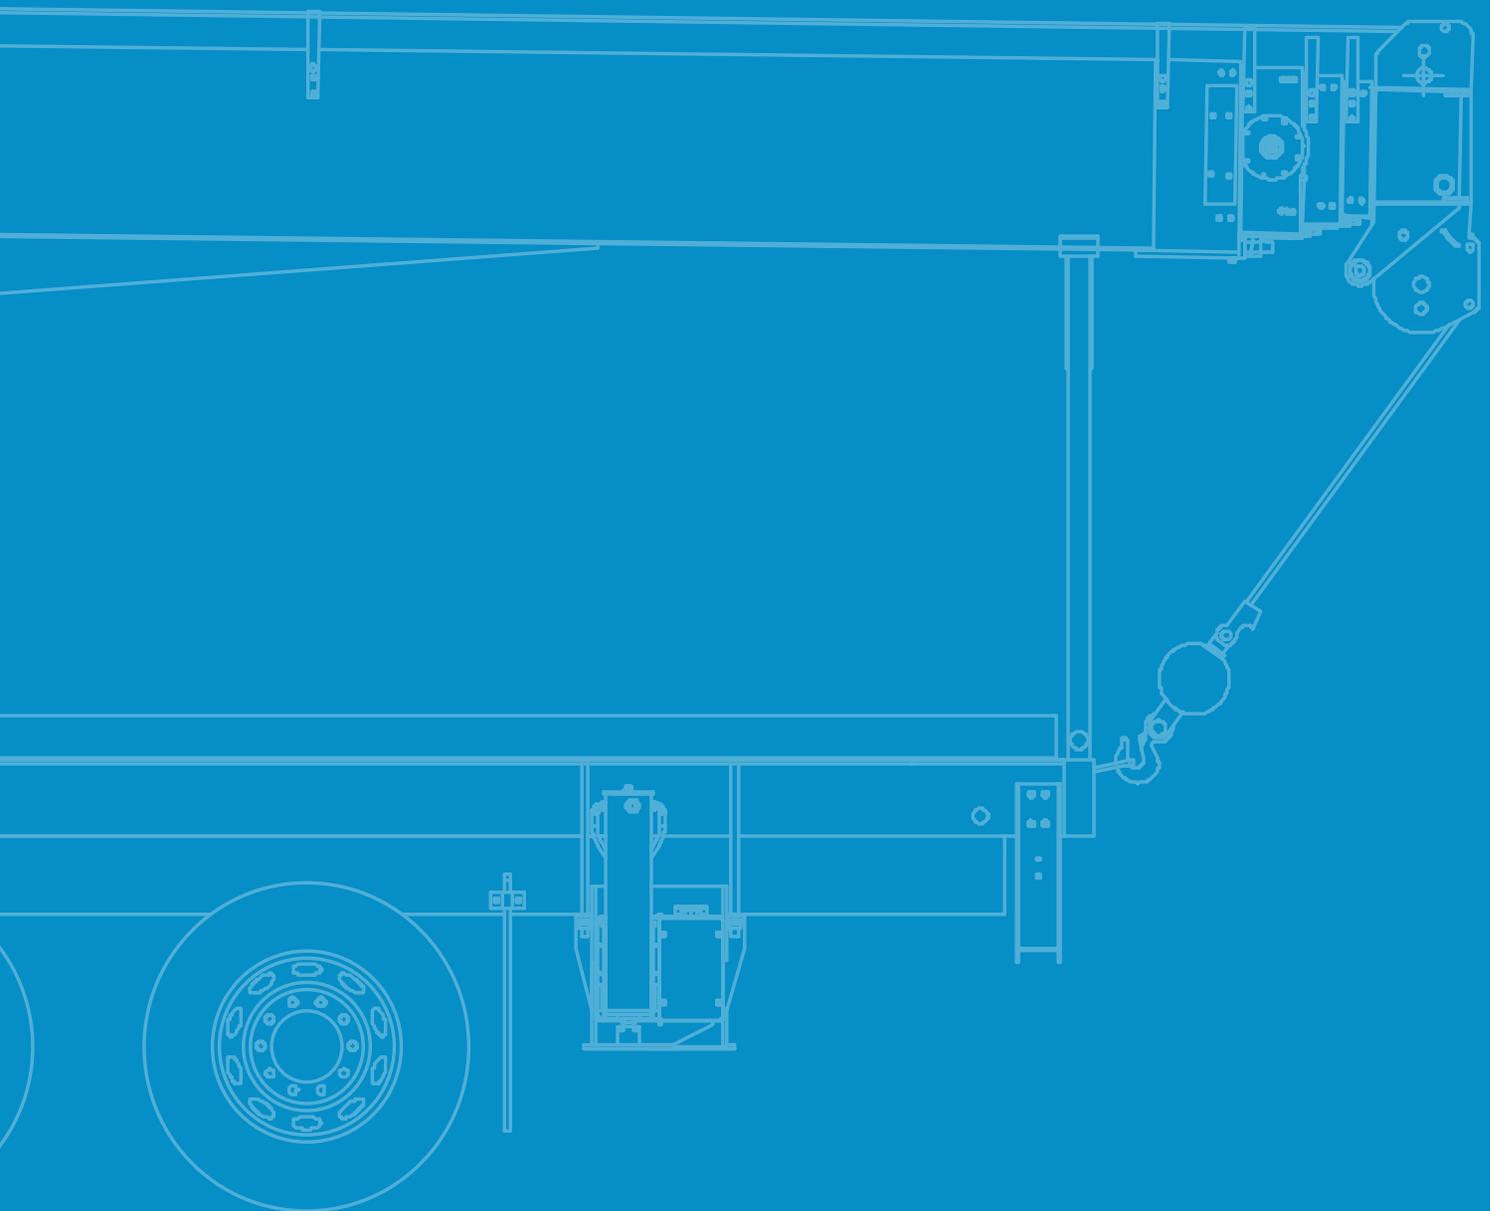

# Technical Description

## Boom



Boom length: Proportional boom

- 4-section 100 ft (30.5 m)
- 5-section 124 ft (37.8 m)

2 upper and 3 lower quick reeve boom point  
Self lubricating slider pads



35100C:

- Boom max. tip height 111.2 ft (33.9 m)
- Boom min. tip height 100 ft (30.5 m)

35124C:

- Boom max. tip height 133.8 ft (40.8 m)
- Boom min. tip height 124 ft (37.8 m)



Boom angle (min./max.):  
-9° / 80.6°

## Rotation



Ball-bearing swing circle with external gear  
Double-reduction planetary gearbox driven by hydraulic motor



Slewing brake:  
Spring-applied pressure released parking brake



Slewing speed: 0 - 1.5 rpm  
Boom rotation: 372° non-continuous

## Outriggers



Outriggers: Out and Down style  
FBS – Front Bumper Stabilizer (optional)  
Outriggers fully extended: 22 ft (6.7 m)  
Stabilizers fully extended: 18.4 ft (5.6 m)

## Hoist, Rope and Hook



Maximum theoretical line speed:  
453 fpm (138 mpm)



Maximum theoretical bottom-layer line pull:  
14,500 lbs (6,577 kg)



Main winch cable diameter: 0.625 in. (15.9 mm)  
rotation resistant



Line length: 380 ft (115.8 m)



Main winch motor:  
Bent axis 2-speed hydraulic motor (activated electrically)



Hook and ball:  
5 t (4.5 mt) capacity hook with heavy-duty swivel and weight is provided for single line operation

# Technical Description

## Hydraulics



- 8-bolt direct mounted PTO and SAE B input and SAE BB output
- 3-section gear pump standard CCW rotation
- Hydraulic reservoir capacity:  
115 gallons (435 liter)
- Pump sections @ 2000 rpm with 100 psi
  - Shaft end pump: 38.4 gpm (145 lpm)
  - Center pump: 27.4 gpm (104 lpm)
  - Cover end pump: 11.2 gpm (42 lpm)

## Operator Aids



- External wired LMI with crane function cut-offs for overload protection
- Wired anti-two block system

## Control System



- Dual operating stations are equipped with four single-lever crane controls arranged in accordance with ANSI B30.5 standards.
- Fully proportional control valves
- Each station includes:
  - Individual control levers for each outrigger and stabilizer
  - Engine start and stop
  - Electronic foot throttle
  - Signal horn
  - Boom angle indicator
  - Beverage holder
  - Load chart with range diagram and mount for removable LMI display

## Electrical System

- State-of-the-art, weather-resistant components throughout
- Hermetically sealed enclosure includes power in relays and circuit status LEDs

## Mounting System

- Pedestal sub-frame and stabilizers are mounted to chassis by threaded rods and clamp plates
- Sub-frame:
  - Torsion resistant, rigid 4-plate design mounted under crane full length of truck frame
- Rear under-ride protection:
  - Standard on factory mounted cranes
- Boom rest:
  - Heavy-duty fabrication, easily removed

# Technical Description – Options

## Flatbeds

- 22 ft (6.7 m) wood bed
- 22 ft (6.7 m) steel bed
- 22 ft (6.7 m) heavy hauler flatbed 0.1875 in. (4.8 mm) steel

## Jib

- 35100C:
- 1-section fixed jib      30.5 ft (9.3 m)
  - 2-section telescopic jib   30.5 ft (9.3 m) – 55 ft (16.8 m) jib
- 35124C:
- 1-section fixed jib      31.0 ft (9.4 m)



- 35100C:
- Max. tip height with extension:      166.7 ft (50.8 m)
  - Max. tip height with extension retracted: 142.1 ft (43.3 m)



- 35124C:
- Max. tip height with extension:      166.0 ft (50.6 m)
  - Max. tip height with extension retracted: 142.1 ft (43.3 m)

## Hoist, Rope and Hook



- 0.625 in. (15.9 mm) diameter
- 6 x 25 EIPS IWRC wire rope

# Technical Description – Options

## Hydraulics



3-section vane pump, CCW or CW

- FBS – Front Bumper Stabilizer
- Hydraulic oil cooler
- Hose reel

## 2-Person Basket



2-person man basket – Aluminum or steel – consult Tadano

- Non-rotating (600 lbs capacity) – Steel
- Rotating quick attached – Aluminum – Main boom only

## Radio Remote



4-function radio remote crane control system

## Tool Boxes and Bulkhead

Tool Boxes

- 24 in. L x 18 in. W x 18 in. H ( 610 mm L x 457 mm W x 457 mm H) – Steel
- 48 in. L x 24 in. W x 24 in. H (1,219 mm L x 610 mm W x 610 mm H) – Aluminium

Bulkhead:

- 24 in. (610 mm)





[www.tadano.com](http://www.tadano.com)

**Tadano Ltd.**

Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan  
Phone: +81-3-6811-7309 (International Division)

**Manitex Inc.**

3000 South Austin Avenue, Georgetown, TX 78626, USA  
Phone: +1 (512) 942-3000



Reaching new heights

