

AS-58C


TELESCOPIC CRAWLER BOOM

MODEL HIGHLIGHTS

- 360° turntable rotation
- Dual lifting capacity
- Low emission engine
- Low ground pressure
- Steel tracks with non-marking pads




AS-58C Range of motion

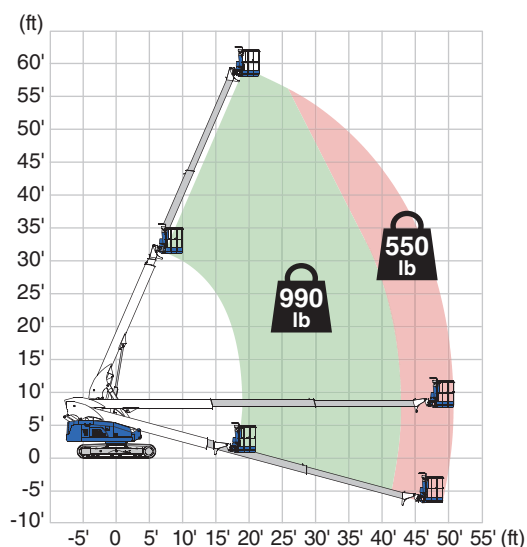

Model	AS-58C
Max. platform capacity	990 lb / 550 lb
Platform size	8'3.6" x 2'11" x 3'7.3"
Max. work height	64'1"
Max. outreach	50'6"

Offers gradeability and versatility to reach up,
over and around jobsite obstacles.
We know Crawlers!

Model		AS-58C	
SPECIFICATIONS		POWER SOURCE	
Max. work height	64'1"	Engine type	Kubota D1803
Max. platform height	58'1"	Rated power	32.0 HP / 2400 min ⁻¹
Max. outreach	50'6"	Fuel tank capacity	34.3 gal
Allowable tilt	5°		
Max. platform capacity	990 lb / 550 lb		
Platform size (L x W x H)		OPTIONS	
8 ft	8'3.6" x 2'11" x 3'7.3"	6 ft platform	6'4.8" x 2'11" x 3'7.3"
6 ft	6'4.8" x 2'11" x 3'7.3"	Generator	Available soon
Platform rotation	180°	LED lighting	
Transport dims (L x W x H)	29'8" x 8'2" x 8'8"		
Machine weight	25,460 lb		
AC outlet to platform (120 V)			
TRAVEL		SAFETY DEVICES	
Max. travel speed	2.05 mph	Emergency stop	✓
Travel position ground pressure	5.8 psi	Foot switch / Enabling switch	✓
Max. gradeability	57%	Slew lock pin	✓
		Auxiliary lowering control	✓
		Traveling restriction (on slope)	✓
		Operation restriction (on slope)	✓
		Overload sensing system	✓
		Battery isolator switch	✓

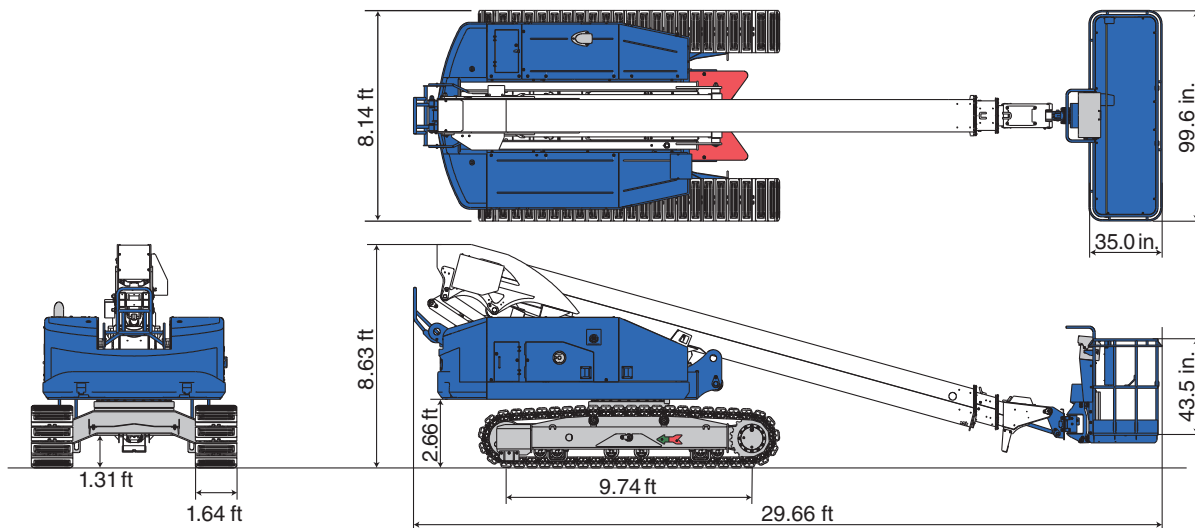

For all our types:



September 2025. Unless otherwise specified, all information in this brochure refers to a standard equipment, and it is intended as general information only. No liability is assumed. Errors reserved. Product specifications and prices are subject to changes without notice. The photographs and/or drawings in this brochure are for illustrative purposes only. For correct and safe operation, the original operating manual and lifting capacity charts are essential. Failure to follow the corresponding Operator's Manual when using our equipment or failure to otherwise act responsibly may result in property damage, serious injury or death. The sole warranty applicable with respect to our equipment is the standard warranty as per general terms and conditions of sales and service (ask your local Tadano dealer for details), and Tadano makes no other warranty, express or implied. All rights reserved. Any use of the trademarks, logos, brand names and model names used herein is prohibited.

© Tadano Ltd. 2025

Tadano Ltd.

Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan
Phone: +81-3-6811-7309 (International Division)

Tadano America Corporation

4242 West Greens Road, Houston, TX 77066, Phone: +1 (281) 869-0030 · Fax: +1 (281) 869-0040

tac.sales@tadano.com
www.tadano.com

