

PM 11025 SP

elevate to the highest power


Lightweight and easy to use, with an excellent power-to-weight ratio and compact size, this range features extremely high performance, reliability & easy maintenance.



MAXIMUM LIFTING MOMENT	9,5 TM
HYDRAULIC OUTREACH	
Horizontal	14,10 m
Vertical	17,00 m
HYDRAULIC SYSTEM	
Recommended oil flow	40 l/min
Max. pressure	35,5 MPa
Tank capacity	80 l
SLEWING SYSTEM	
Slewing angle	400°
Slewing torque	12,0 kNm
STABILISATION	
Spread available	3,4 - 5,0 - 5,5 m
Interlock available	3 - 4 - 5
Stabiliser control	Radio
STANDARD CRANE WEIGHT	
With empty tank	1475 kg



DIMENSIONS

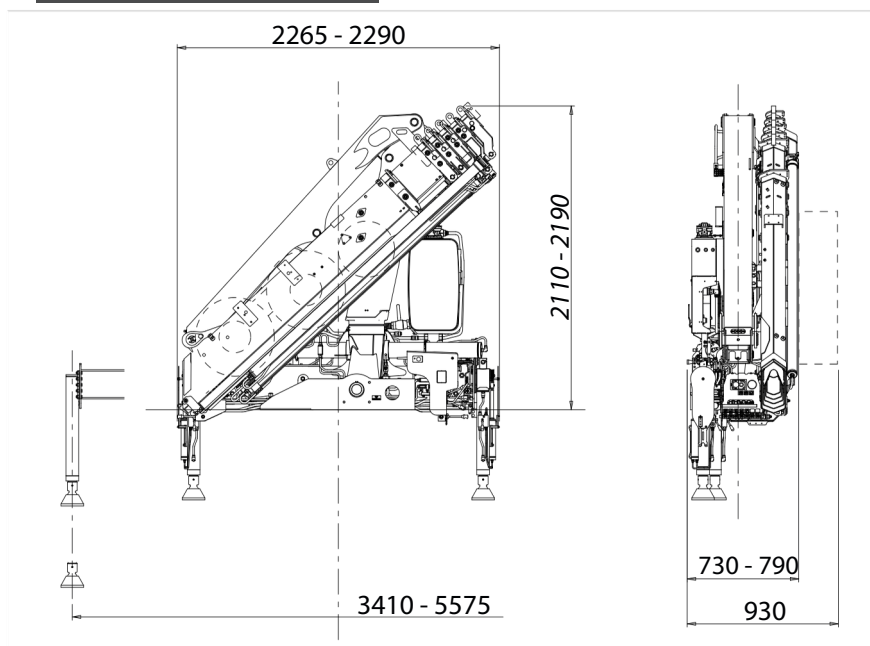

STANDARD EQUIPMENT



Air-oil heat exchanger




Rack




Multifunction radio remote control

*All technical data, descriptions and illustrations are purely indicative and subject to change at PM Oil&Steel own discretion and without notice.

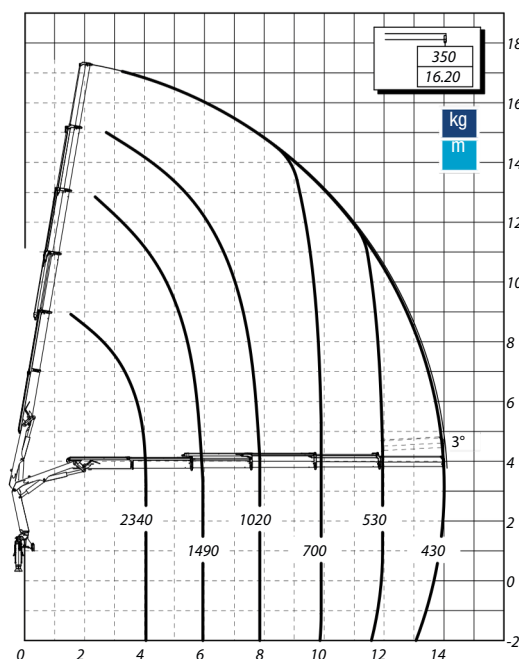

LIFTING CAPACITIES





OPTIONAL



Jib



Hose racks



Hydraulic winch on crane



Hydraulic flip-up outriggers



Hydraulic pull-out outrigger booms



Work spotlight with LED technology

Precision, power, and performance,

The PM 11 SP offers a top-tier power-to-weight ratio, easy operation, and low maintenance. Its digital Load Sensing Valve ensures precise, safe movements, making it a leader in its class. Standard radio remote with display keeps the operator in control. With up to 5 hydraulic extensions, it reaches 14.10 m horizontally and 17.10 m vertically. Adding the optional Fly Jib extends reach to 16.05 m and 18.85 m.