

eAA-22C


ARTICULATED CRAWLER BOOM

OUR TRUE MISSION
ZERO EMISSIONS

MODEL HIGHLIGHTS

- Zero emission – electric drive
- Low ground pressure
- Non-marking rubber tracks
- AGM maintenance free batteries
- Indoor and outdoor performance
- 360° turntable rotation

eAA-22C Range of motion

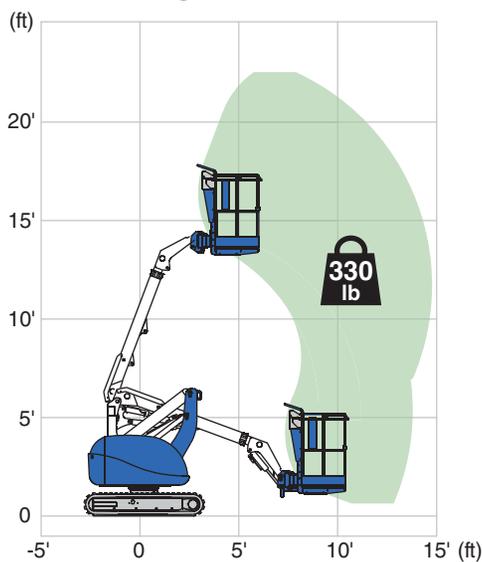


Model	eAA-22C
Max. platform capacity	330 lb
Platform size	3'0.2" x 2'5" x 3'7.3"
Max. work height	28'4"
Max. outreach	14'9"

Extended battery performance, compact crawler engineered for indoor, underground and urban construction applications. We know Crawlers!



Model		eAA-22C	
SPECIFICATIONS			
Max. work height	28'4"	POWER SOURCE	
Max. platform height	22'4"	Power	Electric, AGM battery
Max. outreach	14'9"	Capacity	260 Ah
Allowable tilt	5°	System voltage	8 x 6 V
Max. platform capacity	330 lb	OPTIONS	
Platform size (L x W x H)	3'0.2" x 2'5" x 3'7.3"	LED lighting*	
Platform rotation	130° – L90° ~ R40°	SAFETY DEVICES	
Transport dims (L x W x H)	13'4.6" x 5'5" x 6'6.5"	Emergency stop	✓
Machine weight	6,040 lb	Foot switch / Enabling switch	✓
TRAVEL		Auxiliary lowering control	✓
Max. travel speed	1.37 mph	Traveling restriction (on slope)	✓
Travel position ground pressure	5.66 psi	Operation restriction (on slope)	✓
Max. gradeability	42%	Battery isolator switch	✓

* rear and upper control box only

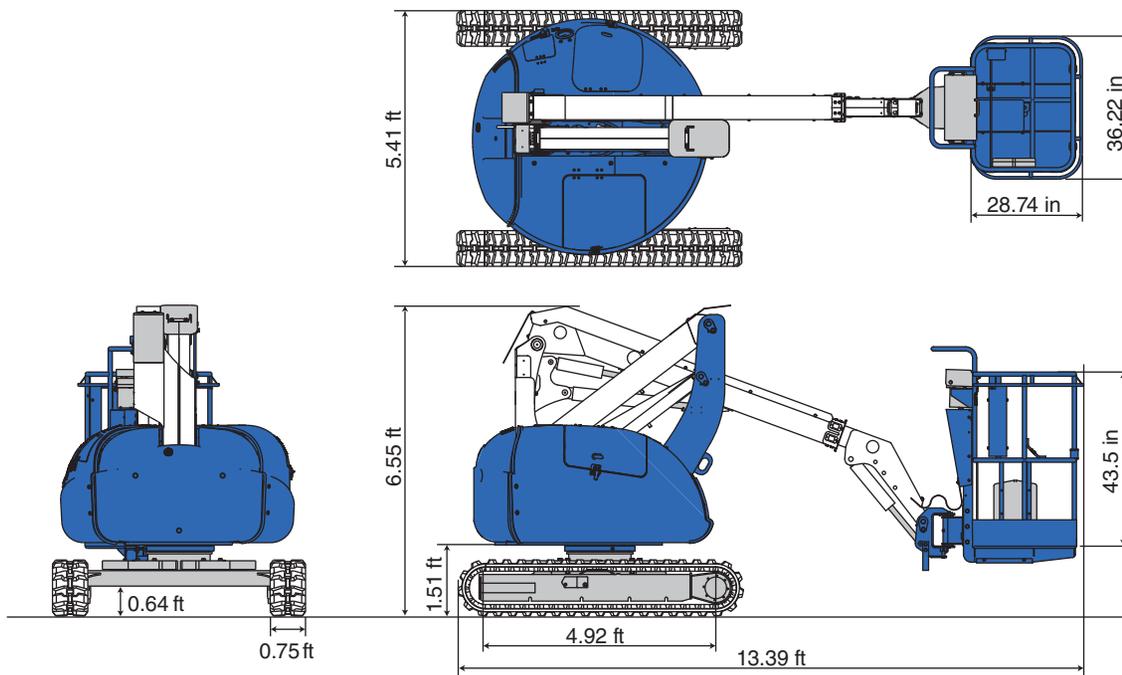

For all our types:



September 2025. Unless otherwise specified, all information in this brochure refers to a standard equipment, and it is intended as general information only. No liability is assumed. Errors reserved. Product specifications and prices are subject to changes without notice. The photographs and/or drawings in this brochure are for illustrative purposes only. For correct and safe operation, the original operating manual and lifting capacity charts are essential. Failure to follow the corresponding Operator's Manual when using our equipment or failure to otherwise act responsibly may result in property damage, serious injury or death. The sole warranty applicable with respect to our equipment is the standard warranty as per general terms and conditions of sales and service (ask your local Tadano dealer for details), and Tadano makes no other warranty, express or implied. All rights reserved. Any use of the trademarks, logos, brand names and model names used herein is prohibited.

© Tadano Ltd. 2025

Tadano Ltd.

Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan
Phone: +81-3-6811-7309 (International Division)

tac.sales@tadano.com
www.tadano.com

Tadano America Corporation

4242 West Greens Road, Houston, TX 77066, Phone: +1 (281) 869-0030 · Fax: +1 (281) 869-0040

